

TABLEAU DES TAILLES - SIZE CHART

Comment choisir la taille de votre vélo ?

La taille d'un vélo dépend en premier lieu de la taille du cadre, même s'il est ensuite possible d'ajuster légèrement en combinant longueur de potence, sortie et recul de selle. Pour choisir son vélo, il faut se demander quelle taille de cadre de vélo vous convient le mieux en fonction de votre morphologie et de votre pratique.

Vous pouvez vérifier la taille de votre vélo à l'aide des chiffres que nous vous donnons à titre indicatif. Si vous hésitez entre deux tailles, merci de vous adresser à votre détaillant qui pourra vous guider dans votre choix en fonction de votre morphologie.

How do i choose the right size ?

The size of a bike depends first and foremost on the size of the frame, even if it's possible to adjust certain components such as the seatpost, the stem and the position of the saddle to fine-tune your set-up. To choose the correct frame size, you'll need to know your style of riding and the kind of bike you're interested in.

The following recommendations will help you choose the right size. If you are hesitating between two sizes, please see your local authorized Lapierre dealer who can help you pick the frame that will be best adapted to your morphology.

SIZE	XS	S	M	L	XL
SPICY	-	1.55 • 1.70	1.70 • 1.80	1.78 • 1.88	> 1.86
ZESTY AM	-	1.55 • 1.70	1.70 • 1.80	1.78 • 1.88	> 1.86
ZESTY TR	-	1.55 • 1.70	1.70 • 1.80	1.78 • 1.88	> 1.86
X-CONTROL	-	1.50 • 1.70	1.68 • 1.78	1.76 • 1.86	> 1.84
XR	-	1.50 • 1.70	1.68 • 1.78	1.76 • 1.86	> 1.84
PRORACE SAT	-	1.50 • 1.70	1.68 • 1.78	1.76 • 1.86	> 1.84
PRORACE	<1.50	1.50 • 1.70	1.68 • 1.78	1.76 • 1.86	> 1.84
EDGE 27"	1.45 • 1.55	1.50 • 1.70	1.68 • 1.78	1.76 • 1.86	> 1.84
EDGE 29"	-	1.50 • 1.70	1.68 • 1.78	1.76 • 1.86	> 1.84
WOMEN SERIES	-	-	-	-	-
X-CONTROL W	-	1.35 • 1.55	1.50 • 1.65	1.60 • 1.75	-
PRORACE ALLOY W,EDGE W	-	1.35 • 1.55	1.50 • 1.65	1.60 • 1.75	-

VTT
MTB

[MTB]


OST+ XR

Notre suspension brevetée OST+ pour un maximum de confort et une efficacité au pédalage optimale. Basée sur une cinématique à point de pivot virtuel, l'effet de pompage induit par le pédalage est en permanence contré par l'effort exercé par la chaîne. Le point de pivot virtuel ramène systématiquement la suspension en position d'équilibre pour empêcher toute apparition de kickback. La courbe de suspension se montre très sensible sur les petits chocs puis plus progressive en fin de course.

FPS+ X-CONTROL

Basée sur un cinématique à point de pivot virtuel, la suspension FPS+ donne au X-Control une motricité sans égal et le rend imbattable au pédalage. La conception de la cinématique FPS+ est telle qu'elle permet de garder le point de pivot virtuel au plus proche de la ligne de chaîne. En situation de pédalage, dès que le triangle arrière s'écarte de sa position d'équilibre, il est ramené par la tension de la chaîne. Le phénomène de pompage est ainsi contré avant même de pouvoir s'amplifier : le vélo est stabilisé et la roue arrière colle littéralement au sol, offrant une adhérence incomparable !

FIT ZESTY - SPICY

Les modèles FIT s'adaptent à la morphologie de chaque pilote et notamment à leur taille, afin de répondre aux besoins spécifiques et procurer les meilleures sensations de ride possible. Ainsi la rigidité structurelle est adaptée en fonction des tailles vélos. Tout comme les composants : la taille des roues, longueur de manivelle, épaisseur des poignées, denture pédalier [réduction des dentures à modèle équivalent], largeur de cintre, débattement tige de selle et le débattement.

LP BOX ZESTY - SPICY

Dans un soucis d'intégration et de fonctionnalité, la LP Box située à côté du BB vous permet d'y loger une chambre à air et autres objets utiles en cas de dépannage afin que vous puissiez piloter tout en légèreté.

TDT TRAPDOOR TECHNOLOGY XR - PRORACE

Ce brevet déposé par Lapierre permet le placement de la batterie Di2 dans le cadre au niveau du boîtier de pédalier. Facilement accessible via un cache de protection, cette technologie possède un double avantage : elle facilite la vie des mécaniciens et permet également d'abaisser le centre de gravité avec un poids au plus près du sol.

POWERBOX TECHNOLOGY PRORACE

La technologie PowerBox englobe le tube diagonal, le boîtier de pédalier et les bases arrières comme un ensemble dédié à la performance. Une rigidité latérale accrue pour un maximum de réactivité, une transmission maximale de la puissance de pédalage, que ce soit sur des accélérations franches, en montée ou en sprint.

SAT SHOCK ABSORPTION TECHNOLOGY PRORACE SAT

Un élastomère qui relie le tube supérieur et le tube de selle permet d'absorber et de dissiper les vibrations, pour un meilleur confort et une meilleure tenue de route. Les vibrations (verticales) sont filtrées par les haubans, puis le caoutchouc et enfin le tube de selle. Le pouvoir d'absorption réside principalement dans nos méthodes de construction carbone et la technologie SAT permet d'accentuer ce pouvoir de flexion notamment au niveau du tube de selle en l'isolant du reste du cadre. Un confort inégalé sur les longues distances et routes difficiles.

TECHNOLOGIE ALUMINIUM

Le choix du matériau de votre cadre est déterminant pour les performances de votre vélo. Nous travaillons sans relâche pour perfectionner nos cadres en aluminium. En travaillant avec les meilleurs spécialistes de l'industrie, nous avons créé un alliage très haut de gamme : Alloy Supreme. 3 niveaux de résistance et de poids. Le Supreme 6, 12% plus résistant et 1,5% plus léger que l'aluminium Alu 7005, c'est un alliage d'une longévité exceptionnelle.

TECHNOLOGIE CARBONE

Chez Lapierre, nous utilisons 4 types de fibres distinctes avec des caractéristiques qui leur sont propres. En utilisant ces différentes fibres, nos ingénieurs sont en mesure d'adapter la rigidité, la souplesse et la résistance nécessaires aux zones du cadre directement concernées. La fibre Haute Résistance est celle dont vous aurez besoin pour l'absorption et le confort : tige de selle, bases, haubans voire même un cadre tout entier, tandis que la fibre Très Haut Module sera d'une efficacité et d'une rigidité à toute épreuve. Les fibres que nous utilisons : Haute résistance (24 tonnes), module intermédiaire (30 tonnes), haut module (40 tonnes) et très haut module (46 tonnes).

TAILLES DES ROUES

Le bon diamètre pour la bonne pratique. Les différentes tailles de roues de nos VTT nous permettent de vous fournir le meilleur vélo en fonction de votre pratique, de vos terrains favoris, de votre gabarit. Le 29" est l'arme absolue pour la compétition en cross-country car il prodigue une stabilité et une adhérence accrues à grande vitesse sur les passages techniques, mais aussi en descente, grâce à une surface au sol du pneu supérieure. Le 27.5", idéalement adapté au all-mountain et à l'enduro, représente le parfait compromis entre maniabilité, nervosité et franchissement. Le 27.5+ est plus ludique et plus sécurisant du fait de son confort et de son adhérence supérieurs, notamment au freinage. Ce standard est parfaitement adapté aux VTT à assistance électrique ainsi qu'aux VTT de notre gamme sport.

OST+ XR

Our patented OST+ suspension offers maximum comfort and optimal pedalling efficiency. The virtual pivot point takes the suspension back to the equilibrium point for maximum efficiency and the suspension curve is very sensitive for little bumps and more progressive at the end of the travel.

FPS+ X-CONTROL

Based on a virtual pivot point, the FPS+ suspension gives the X-Control an unrivalled momentum and makes it unbeatable at pedaling. We obtain a suspension that permanently corrects itself. The conception of the FPS+ kinematics enables us to keep the virtual pivot point as close as possible to the line of the chain. As soon as the rear triangle is forced out of the equilibrium position by pedaling, the chain tension brings it back into position. Pedal bob is therefore counteracted before becoming problematic. The bike is stabilised and the rear wheel is literally glued to the ground, offering unbeatable adherence!

FIT ZESTY - SPICY

The FIT models adapt to the body shape of each rider, in particular their size, to suit specific requirements and offer the best possible riding sensation. This way, structural rigidity is adapted to bike size. As are the components: wheel-set size, crank arm length, grips thickness, crank set size [reduction in teeth compared to an equivalent model], handlebar width, seat post length and suspension travel.

LP BOX ZESTY - SPICY

To ensure integration and functionality, the LP Box by the BB lets you stow a tube and other useful items in case of breakdown, so you can ride unencumbered.

TDT
TDT (TRAPDOOR TECHNOLOGY) XR - PRORACE

This Lapierre patent pending Technology integrates the Di2 battery neatly in the frame. With a quick and easy trap door to access, TDT makes the mechanics job faster and lowers the centre of gravity, making pedalling more efficient.

POWERBOX
POWERBOX TECHNOLOGY PRORACE

Power Box technology is made up of the down tube, bottom bracket shell and chainstays, which comprise one performance-dedicated whole. Increased lateral stiffness for maximum responsiveness and best possible pedal-power transfer, whether during bursts of acceleration, climbs or sprints.

SAT
(SHOCK ABSORPTION TECHNOLOGY) PRORACE SAT

An elastomer damper between top tube and seat tube, which absorbs and dissipates vibration for better comfort and roadholding. Vertical vibration is cut out by the seatstays, then by the rubber and, lastly, by the seat tube. SAT's shock-absorption capacity is mainly based on our carbon build methods and it makes it possible, in particular, to produce seat tubes that flex more, since they are cut off from the rest of the frame. The elastomer damper acts as a buffer for better cushioning of bumps and vibration. Unbeatable comfort over long distances and on tough road surfaces.

ALLOY TECHNOLOGY

The material chosen for your frame is critical to your bike's performance. We work tirelessly to perfect our aluminium frames. Working with the best specialists in the industry, we have created our very high-end Alloy Supreme. It has three levels of strength and weight. Supreme 6 is 12% stronger and 1.5% lighter than Alu 7005 aluminium. It is an exceptionally durable alloy.

4

LIGHT : +

RESISTANCE : +

5

LIGHT : ++

RESISTANCE : ++

6

LIGHT : +++

RESISTANCE : +++

CARBON TECHNOLOGY

We at Lapierre use four distinct fibre types, each with its own characteristics. Our engineers can use these different fibres to adapt the stiffness, flex and strength needed for the parts of the frame in question. High-strength fibre is what you will need for shock absorption and comfort: seatpost, chainstays, seatstays or even the whole frame. Very high-modulus, meanwhile, will have unyielding stiffness and efficiency. In our MTBs, we use 4 different type of fibres and we know how to get the best of each one: high resistance (24 tons), intermediate modulus (30 tons), high modulus (40 tons) and very high modulus (46 tons).

WHEEL SIZE

The right diameter for the right discipline. Our different MTB wheel sizes enable us to provide you with the best bike for the way you ride, for your favourite terrain and for your build. The 29" is the ultimate weapon for X-country competition and trails because it boasts increased stability and grip at high speeds for technical sections and downhills, thanks to the tire's greater surface area. Perfectly suited to all-mountain and enduro, the 27.5" represents the perfect compromise between handling, responsiveness and rollover. The 27.5+ is more fun and reassuring because of its better comfort and grip, particularly when braking. This standard is perfectly suited to power-assisted MTBs and to MTBs from our sport range.

SPICY FIT




SPICY FIT

OVERVIEW

GÉOMÉTRIE 27.5" 29" GEOMETRY

Size	S	M	M	L	XL
ST (mm)	400	430	430	460	500
TT (mm)	573	607	610	639	668
HA (°)	64,5	64,5	65	65	65
SA (°)	75	75	74,5	74,5	74,5
RC (mm)	425	425	433	433	433
HT (mm)	90	105	105	120	135
BB (mm)	-15	-15	-28	-28	-28
Frk Travel	170	170	160	160	160
Frk Length	580	580	570	570	570
Frk Offset	42	42	42	42	42
Stack	602	615	622	636	649
Reach	415	445	440	465	490
WB	1163	1200	1195	1227	1258

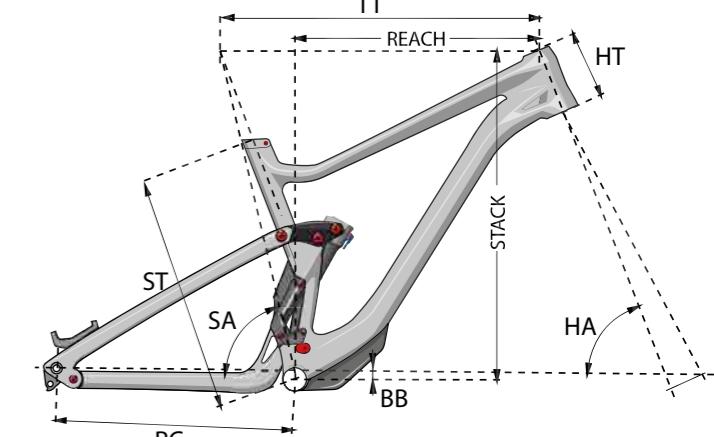


27.5" 29"

User → S 155-170 M 170-180 L 178-188 XL >186
Ref. → D28X4000 D28X4300 D28X4300 D28X4600 D28X5000

ENDURO



SPICY FIT TEAM ULTIMATE

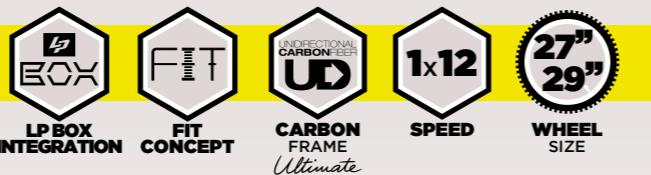

Cadre - Frame
SPICY FIT FULL CARBON ULTIMATE 170mm (27.5), 160mm (29) travel PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
ROCKSHOX LYRIK ULTIMATE RCT3 CHARGER 2 BOOST 15x110 170MM (27.5), 160MM (29) (SIGNATURES SERIE GLOSSY RED)

Amortisseur - Shock
ROCKSHOX SUPER DELUXE COIL ULTIMATE RCT TRUNNION 205*60(29") 205*65 (27.5")

Dérailleur arrière - Rear Derailleur
SRAM X01 AXS EAGLE CARBON 12SPD

Pédalier - Crankset
SRAM DESCENDANT CARBON EAGLE BOOST148 DUB 12SPD. 170/32T (S), 170/34T (M 27.5"), 170/32T (M 29"), 175/32 (L, XL)

Boîtier Pédalier - Bottom Bracket
DUB PRESS FIT MTB 92

Cassette - Sprocket
SRAM XG1275 EAGLE 10-50 12SPD

Chaîne - Chain
SRAM GX EAGLE 12SPD

Freins (avt-arr) - Brakes (front-rear)
SRAM G2 RSC

Disques - Rotors
SRAM CENTERLINE ROUNDED 200/200

Levier - Shifters
SRAM X01 AXS EAGLE MATCHMAKER 12SPD

Jeu de direction - Headset
FSA ORBIT ZERO STACK + ANGLESET 0.5°

Cintre - Handlebar
RACEFACE SIXC CARBON 20MM RISE 785MM (Silver / White logo)

Poignées - Grips
LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")

Potence - Stem
LP FULL CNC 0° 35MM (S, M, L), 45MM (XL)

Tige de selle - Seatpost
REVERB AXS 31.6mm 100mm (S), 125mm (M), 150(L/XL) Travel

Selle - Saddle
Lapierre by Velo

Roues Complètes - Wheelset
LAPIERRE AM CARBON 27.5x30c (27.5") 29x30c (29"), BOOST, XD DRIVER

Pneus - Tires
MAXXIS MINION DHF 2.50WT / DHR II 2.40WT 120TPI 3C Maxxterra EXO+ TR (27.5" & 29")

Pédales - Pedals
NW-91K

Accessoires - Accessories
TUBELESS VALVES

SPICY FIT 8.0



Cadre - Frame
NEW SPICY FIT FULL CARBON ULTIMATE 170mm (27.5), 160mm (29) travel PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
FOX 36 FLOAT FACTORY BOOST 15x110 170MM (27.5), 160MM (29)

Amortisseur - Shock
FOX DHX2 FACTORY TRUNNION 205*65 (27.5) 205*60(29)

Dérailleur arrière - Rear Derailleur
SHIMANO NEW K-RDM8100 XT SGS 12 Spd

Pédalier - Crankset
SHIMANO NEW XT FC-M8120 170/32T (S), 170/34T (M 27.5"), 170/32T (M, 29"), 175/32T (L, XL)

Boîtier Pédalier - Bottom Bracket
SHIMANO BBMT800 Pressfit

Cassette - Sprocket
SHIMANO NEW SLX 10-51T 12 Spd

Chaîne - Chain
SHIMANO NEW SLX 12 Spd

Freins (avt-arr) - Brakes (front-rear)
SHIMANO NEW XT B-LM 8100/BR8120 (4 pistons)

Disques - Rotors
SHIMANO RT - MT800 (203/203)

Levier - Shifters
SHIMANO NEW SLX 1x12

Jeu de direction - Headset
FSA ORBIT ZERO STACK + ANGLESET 0.5°

Cintre - Handlebar
LP 6061DB 760MM (S), 780 (M, L, XL) 20MM RISE, 31.8 BAR BORE

Poignées - Grips
LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")

Potence - Stem
LP FULL CNC 0° 35MM (S, M, L), 45MM (XL)

Tige de selle - Seatpost
LP 7075 DROPPER 100(S), 125(M), 150 (L, XL)

Selle - Saddle
Lapierre by Velo

Roues Complètes - Wheelset
DT SWISS E1700 SPLINE 30c BOOST Tubeless ready (Centerlock - MICROSPLINE body)

Pneus - Tires
MAXXIS MINION DHF 2.50WT / DHR II 2.40WT 120TPI 3C Maxxterra EXO+ TR (27.5" & 29")

Pédales - Pedals
NW-91K

Accessoires - Accessories
TUBELESS VALVES

MTB

SPICY FIT 5.0



Cadre - Frame
SPICY FIT FULL CARBON ULTIMATE 170mm (27.5), 160mm (29) travel PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
FOX 36 FLOAT PERFORMANCE BOOST 15x110 170MM (27.5), 160MM (29)

Amortisseur - Shock
FOX DHX2 PERFORMANCE ELITE TRUNNION

Dérailleur arrière - Rear Derailleur
SRAM GX EAGLE 12SPD

Pédalier - Crankset
SRAM DESCENDANT 7K EAGLE BOOST 148 DUB 12SPD. 170/32T (S), 170/34T (M 27.5'), 170/32T (M 29'), 175/32T (L, XL)

Boîtier Pédalier - Bottom Bracket
DUB PRESS FIT MTB 92

Cassette - Sprocket
SRAM PG1230 EAGLE 11-50 12SPD

Chaîne - Chain
SRAM NX EAGLE 12SPD

Freins (avt-arr) - Brakes (front-rear)
SRAM GUIDE R

Disques - Rotors
SRAM CENTERLINE ROUNDED 200/200

Levier - Shiftevers
SRAM NX EAGLE MATCHMAKER 12SPD

Jeu de direction - Headset
FSA ORBIT ZERO STACK + ANGLESET 0.5°

Cintre - Handlebar
LP 6061DB 760MM (S), 780 (M, L, XL) 20MM RISE, 31.8 BAR BORE

Poignées - Grips
LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")

Potence - Stem
LP FULL CNC 0° 35MM (S, M, L), 45MM (XL)

Tige de selle - Seatpost
LP 7075 DROPPER 100(S), 125(M), 150 (L, XL)

Selle - Saddle
Lapierre by Velo

Moyeu avant - Front hub
LAPIERRE BY FASTACE DF813, BOOST 15x110, 32H

Moyeu arrière - Rear hub
LAPIERRE BY FASTACE DR813, 4 SEALED BEARINGS, BOOST 12x148, 32H

Jantes - Rims
MAVIC EX630 32H, TUBELESS READY

Pneus - Tires
Maxxis HIGH ROLLER II 2.50WT (front) / HIGH ROLLER II 2.40WT (rear)


Pédales - Pedals
NW-91K

Accessoires - Accessories
TUBELESS VALVES

SPICY FIT 3.0

GÉOMÉTRIE / GEOMETRY

Size	S	M	M	L	XL
ST (mm)	400	430	430	460	500
TT (mm)	573	607	610	639	668
HA (°)	64,5	64,5	65	65	65
SA (°)	75	75	74,5	74,5	74,5
RC (mm)	425	425	433	433	433
HT (mm)	90	105	105	120	135
BB (mm)	-15	-15	-28	-28	-28
Frk Travel	170	170	160	160	160
Frk Length	580	580	570	570	570
Frk Offset	42	42	42	42	42
Stack	602	615	622	636	649
Reach	415	445	440	465	490
WB	1163	1200	1195	1227	1258

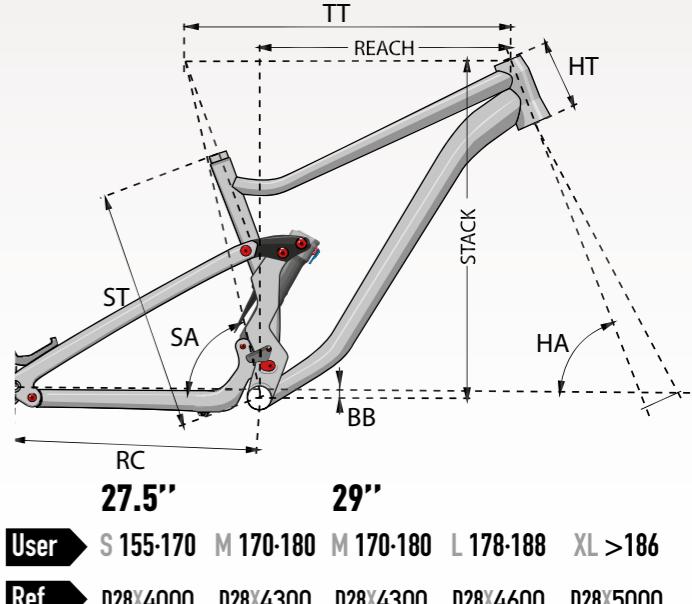

ENDURO



SPICY FIT 3.0



 Cadre - Frame
SPICY FIT SUPREME 5 170mm (27.5), 160mm (29) travel PRESSFIT, BOOST, METRIC, THRU AXLE

 Fourche - Fork
FOX 36 FLOAT PERFORMANCE BOOST 15x110 170MM (27.5), 160MM (29)

 Amortisseur - Shock
FOX VAN R shock

 Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12SPD

 Pédalier - Crankset
SRAM SX Eagle BOOST 12SPD 170/32T (S), 170/34T (M 27.5"), 170/32T (M 29"), 175/32T (L, XL)

 Boîtier Pédalier - Bottom Bracket
Sram DUB PF MTB92

 Cassette - Sprocket
SRAM SX Eagle 12SPD

 Chaîne - Chain
SRAM SX Eagle 12SPD

 Freins (avt-arr) - Brakes (front-rear)
SRAM GUIDE T

 Disques - Rotors
SRAM CENTERLINE ROUNDED 200/200

 Levier - Shiftlevers
SRAM SX Eagle 12SPD

 Jeu de direction - Headset
FSA ORBIT ZERO STACK + ANGLESET 0°

 Cintre - Handlebar
LP 6061DB 760MM (S), 780 (M, L, XL) 20MM RISE, 31.8 BAR BORE

 Poignées - Grips
LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")

 Potence - Stem
LP FULL CNC 0° 35MM (S, M, L), 45MM (XL)

 Tige de selle - Seatpost
LP DROPPER by JD 80(S), 100(M), 130 (L, XL)

 Selle - Saddle
Lapierre by Velo

 Moyeu avant - Front hub
LAPIERRE BY FASTACE DF813, BOOST 15x110, 32H

 Moyeu arrière - Rear hub
LAPIERRE BY FASTACE DR813, 4 SEALED BEARINGS, BOOST 12x148, 32H

 Jantes - Rims
MAVIC EX630 32H, TUBELESS READY

 Pneus - Tires
MAXXIS MINION DHF 2.50WT/ Minion DHRII 2.40WT

 Pédales - Pedals
NW-91K

 Accessoires - Accessories
TUBELESS VALVES



ZESTY AM

ZESTY AM FIT

OVERVIEW


GÉOMÉTRIE

27.5"

29"

GEOMETRY


Size	S	M	M	L	XL
ST (mm)	400	430	430	460	500
TT (mm)	571	605	608	637	666
HA (°)	65,5	65,5	66	66	66
SA (°)	75,7	75,7	75	75	75
RC (mm)	425	425	433	433	433
HT (mm)	90	105	105	120	135
BB (mm)	-20	-20	-32	-32	-32
Frk Travel	150	150	140	140	140
Frk Length	560	560	550	550	550
Frk Offset	42	42	42	42	42
Stack	594	608	613	627	641
Reach	420	450	445	470	495
WB	1157	1194	1188	1218	1250

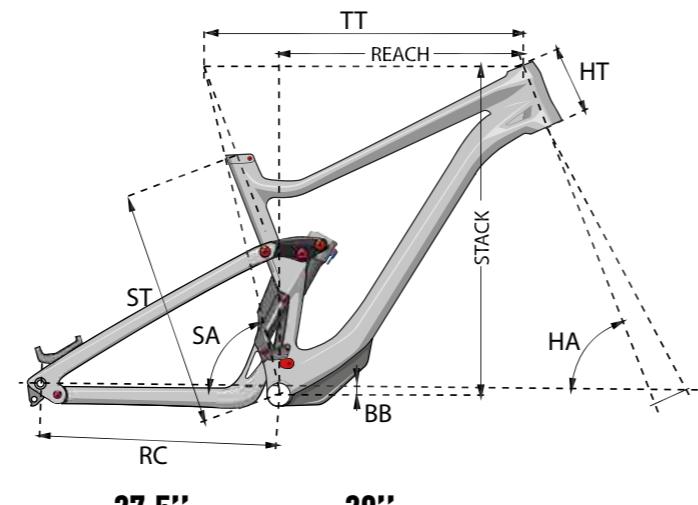

User → S 155-170 M 170-180 L 170-180 XL >186

Ref. → D27X4000 D27X4300 D27X4300 D27X4600 D27X5000

ZESTY AM FIT 8.0



ALL MOUNTAIN



MTB

- Cadre - Frame
ZESTY AM FIT FULL CARBON ULTIMATE 150mm (27.5), 140mm (29) travel PRESSFIT, BOOST, METRIC, THRU AXLE
- Fourche - Fork
FOX 34 FACTORY KASHIMA BOOST 150MM (27.5), 140MM (29)
- Amortisseur - Shock
FOX DPX2 FACTORY KASHIMA TRUNNION
- Dérailleur arrière - Rear Derailleur
SRAM X01 EAGLE CARBON 12SPD
- Pédalier - Crankset
SRAM X1 CARBON EAGLE BOOST148 DUB 12SPD. 32T (S/27.5), 34T (M/27.5), 32T (M, L, XL/29)
- Boîtier Pédalier - Bottom Bracket
DUB PRESS FIT MTB 92
- Cassette - Sprocket
SRAM XG1275 EAGLE 10-50 12spd
- Chaîne - Chain
SRAM GX EAGLE
- Freins (avt-arr) - Brakes (front-rear)
SRAM G2 RSC Diff Black
- Disques - Rotors
SRAM CENTERLINE ROUNDED 180/180 (27.5), 200/180 (29)
- Levier - Shift/Brake Levers
SRAM GX EAGLE MATCHMAKER 12SPD
- Jeu de direction - Headset
FSA ORBIT ZERO STACK + ANGLESET 0.5°
- Cintre - Handlebar
LP 6061DB 760MM (S,M), 780 (L,XL), 15MM RISE, 31.8 BAR BORE
- Poignées - Grips
LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")
- Potence - Stem
LP FULL CNC 0° 35MM (S, M, L), 45MM (XL)
- Tige de selle - Seatpost
LP 7075 DROPPER 100(S), 125(M), 150 (L, XL)
- Selle - Saddle
Lapierre by Velo
- Roues Complètes - Wheelset
LAPIERRE AM CARBON 27.5x30c (S, M), 29x30c (M, L, XL), BOOST, XD DRIVER
- Pneus - Tires
MAXXIS HIGH ROLLER II WIDE TRAIL 27.5x2.4 (S, M), 29x2.5 (M, L, XL)
MAXXIS HIGH ROLLER II 27.5x2.4 (S,M), MINION DHR 29x2.4 WT (M, L, XL)
- Pédales - Pedals
NW-91K
- Accessoires - Accessories
TUBELESS VALVES

Ref. → D276 / D277

ZESTY AM FIT 5.0



Cadre - Frame

ZESTY AM FIT FULL CARBON ULTIMATE 150mm (27.5), 140mm (29) travel
PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork

ROCKSHOX REVELATION RC MOTION CONTROL BOOST 150MM (27.5), 140MM (29)

Amortisseur - Shock

ROCKSHOX DELUXE SELECT+ RL 205X57.5/60 DEBONAIR TRUNION

Dérailleur arrière - Rear Derailleur

SRAM GX EAGLE 12SPD

Pédalier - Crankset

SRAM X1 CARBON EAGLE BOOST 148 DUB 12SPD. 32T (S/27.5), 34T (M/27.5), 32T (M, L, XL/29)

Boîtier Pédalier - Bottom Bracket

DUB PRESS FIT MTB 92

Cassette - Sprocket

SRAM PG1230 EAGLE 11-50 12spd

Chaîne - Chain

SRAM SX EAGLE 12SPD

Freins (avt-arr) - Brakes (front-rear)

SRAM GUIDE R

Disques - Rotors

SRAM CENTERLINE ROUNDED 180/180 (27.5), 200/180 (29)

Levier - Shifters

SRAM NX EAGLE MATCHMAKER 12SPD

Jeu de direction - Headset

FSA ORBIT ZERO STACK + ANGLESET 0.5°

Cintre - Handlebar

LP 6061 DB 760MM (S.M), 780 (L, XL), 15MM RISE, 31.8 BAR BORE

Poignées - Grips

LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")

Potence - Stem

LP FULL CNC 0° 35MM (S, M, L), 45MM (XL)

Tige de selle - Seatpost

LP 7075 DROPPER 100(S), 125(M), 150 (L, XL)

Selle - Saddle

Lapierre by Velo

Moyeu avant - Front hub

LAPIERRE BY FASTACE DF813 BOOST 15x110, 32H

Moyeu arrière - Rear hub

LAPIERRE BY FASTACE DR813 4 SEALED BEARINGS, BOOST 12x148, 32H

Jantes - Rims

MACH 1 Trucky 30 584*30 (27.5") / 622*30 (29.5")

Pneus - Tires

MAXXIS HIGH ROLLER II WIDE TRAIL 27.5x2.4 (S, M), 29x2.5 (M, L, XL) MAXXIS HIGH ROLLER II 27.5x2.4 (S,M), MINION DHR 29x2.4 WT (M, L, XL)

Pédales - Pedals

NW-91K

Accessoires - Accessories

TUBELESS VALVES

OVERSEAS : Mavic EX630 DISC FRONT, EN627 DISC REAR


D274 / D275 Ref.

ZESTY AM FIT

OVERVIEW

GÉOMÉTRIE 27.5" 29" GEOMETRY

Size	S	M	M	L	XL
ST (mm)	400	430	430	460	500
TT (mm)	571	605	608	637	666
HA (°)	65,5	65,5	66	66	66
SA (°)	75,7	75,7	75	75	75
RC (mm)	425	425	433	433	433
HT (mm)	90	105	105	120	135
BB (mm)	-20	-20	-32	-32	-32
Frk Travel	150	150	140	140	140
Frk Length	560	560	550	550	550
Frk Offset	42	42	42	42	42
Stack	594	608	613	627	641
Reach	420	450	445	470	495
WB	1157	1194	1188	1218	1250

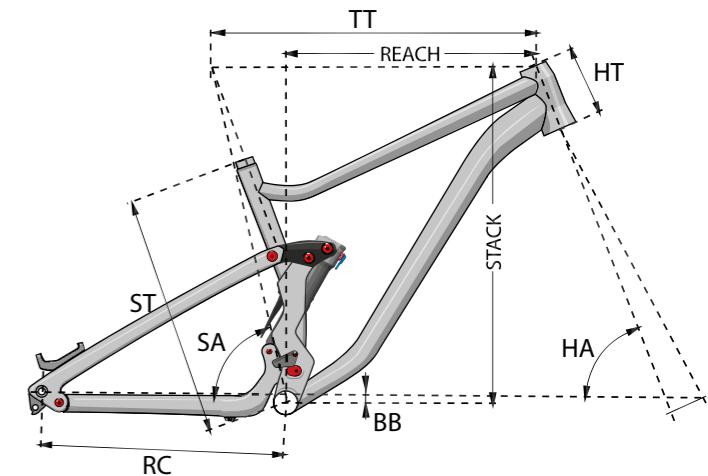

User Ref. S 155-170 M 168-176 M 168-176 L 174-184 XL >182
Ref. D27X4000 D27X4300 D27X4300 D27X4600 D27X5000

ALL MOUNTAIN



ZESTY AM FIT 4.0

FIT CONCEPT **5 ALU SUPREME 5 FRAME** **1x12 SPEED** **27" 29" WHEEL SIZE**



Cadre - Frame
ZESTY AM FIT SUPREME 5 150mm (27.5), 140mm (29) travel PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
ROCKSHOX REVELATION RC MOTION CONTROL BOOST 150MM (27.5), 140MM (29)

Amortisseur - Shock
ROCKSHOX DELUXE SELECT + 205X60/57.5 DEBONAIR

Dérailleur arrière - Rear Derailleur
SRAM NX EAGLE 12SPD

Pédalier - Crankset
SRAM NX EAGLE BOOST148 DUB 12SPD. 32T (S/27.5), 34T (M/27.5), 32T (M, L, XL/29)

Boîtier Pédalier - Bottom Bracket
DUB PRESS FIT MTB 92

Cassette - Sprocket
SRAM PG1210 EAGLE 11-50 12spd

Chaîne - Chain
SRAM SX EAGLE

Freins (avt-arr) - Brakes (front-rear)
SRAM GUIDE T

Disques - Rotors
CENTERLINE ROUNDED 180/180 (27.5), 200/180 (29)

Levier - Shiftlevers
SRAM NX EAGLE 12SPD

OVERSEAS : Mavic EX630 DISC FRONT & REAR

ZESTY AM FIT 3.0

FIT CONCEPT **5 ALU SUPREME 5 FRAME** **1x12 SPEED** **27" 29" WHEEL SIZE**



Jeu de direction - Headset
FSA ORBIT ZERO STACK + ANGLESET 0.5°

Cintre - Handlebar
LP 6061DB 760MM (S.M), 780 (L, XL), 15MM RISE, 31.8 BAR BORE

Poignées - Grips
LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")

Potence - Stem
LP FULL CNC 0° 35MM (S, M, L), 45MM (XL)

Tige de selle - Seatpost
LP DROPPER by JD 80(S), 100(M), 130 (L, XL)

Selle - Saddle
Lapierre by Velo

Moyeu avant - Front hub
LAPIERRE BY FASTACE DF813, BOOST 15x110, 32H

Moyeu arrière - Rear hub
LAPIERRE BY FASTACE DR813, 4 SEALED BEARINGS, BOOST 12x148, 32H

Jantes - Rims
MACH 1 Trucky 30 584*30 (27.5") / 622*30 (29.5")

Pneus - Tires
MAXXIS HIGH ROLLER II WIDE TRAIL 27.5x2.4 (S, M), 29x2.5 (M, L, XL)
MAXXIS HIGH ROLLER II 27.5x2.4 (S,M), MINION DHR 29x2.4 WT (M, L, XL)"

Pédales - Pedals
NW-91K

Accessoires - Accessories
TUBELESS VALVES

Cadre - Frame
ZESTY AM FIT SUPREME 5 150mm (27.5), 140mm (29) travel PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
ROCKSHOX 35 GOLD RL BOOST 150MM (27.5), 140MM (29)

Amortisseur - Shock
LAPIERRE AF2 AIR TRUNNION METRIC REBOUND & LOCKOUT

Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12SPD

Pédalier - Crankset
SRAM SX Eagle 12SPD. 32T (S/27.5), 34T (M/27.5), 32T (M, L, XL/29)

Boîtier Pédalier - Bottom Bracket
Sram DUB PF MTB92

Cassette - Sprocket
SRAM SX Eagle 12SPD

Chaîne - Chain
SRAM SX Eagle 12SPD

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT401

Disques - Rotors
SHIMANO SM-RT30 180/180MM (27.5), 200/180MM (29)

Levier - Shiftlevers
SRAM SX Eagle 12SPD

Jeu de direction - Headset
FSA ORBIT ZERO STACK + ANGLESET 0.5°

Cintre - Handlebar
LP 6061DB 760MM, 15MM RISE, 31.8 BAR BORE

Poignées - Grips
LP Grips "FIT". (Size Small on 27.5" / Size Large on 29")

Potence - Stem
LP ALLOY 0° 35MM (S, M, L), 45MM (XL)

Tige de selle - Seatpost
LP DROPPER by JD 80(S), 100(M), 130 (L, XL)

Selle - Saddle
Lapierre by Velo

Moyeu avant - Front hub
SHIMANO MT400, BOOST 15x110, CENTERLOCK, 32H

Moyeu arrière - Rear hub
SHIMANO MT400, BOOST 12x148, CENTERLOCK, 32H

Jantes - Rims
MACH 1 Trucky 30 584*30 (27.5") / 622*30 (29.5")

Pneus - Tires
MAXXIS HIGH ROLLER II 27.5*2.40 60 TPI EXO-TR / HIGH ROLLER II 29*2.30 60 TPI EXO-TR --- HIGH ROLLER II 27.5*2.35 60 TPI EXO-TR / HIGH ROLLER II 29*2.30 60 TPI EXO-TR"

Pédales - Pedals
NW-91K

Accessoires - Accessories
TUBELESS VALVES

OVERSEAS : Mavic EX630 DISC FRONT & REAR
Maxxis HIGH ROLLER II WT 2.5 FRONT, 2.4 REAR

ZESTY TR



ZESTY TR

OVERVIEW

GÉOMÉTRIE

Size	S	M	L	XL		Size	XS	S	M	L
ST (cm)	39	43	47	51		ST (cm)	37	39	42	45
TT (mm)	591	613	633	655		TT (mm)	546	562	587	609
HA (°)	66	66	66	66		HA (°)	66,5	66,5	67,5	67,5
SA (°)	74,5	75	75,5	76		SA (°)	74	74,5	74,5	75
RC (mm)	428	428	428	428		RC (mm)	425	425	428	428
HT (mm)	100	110	120	130		HT (mm)	95	100	95	110
BB (mm)	-40	-40	-35	-35		BB (mm)	-25	-25	-40	-35
Reach	425	450	475	500		Reach	385	405	420	445
Stack	598	608	612	621		Stack	561	566	601	610

User → 150-170 168-178 176-186 >184

Ref. → D22X3900 D22X4300 D22X4700 D22X5100



GEOMETRY

	Size	XS	S	M	L
ST (cm)	37	39	42	45	
TT (mm)	546	562	587	609	
HA (°)	66,5	66,5	67,5	67,5	
SA (°)	74	74,5	74,5	75	
RC (mm)	425	425	428	428	
HT (mm)	95	100	95	110	
BB (mm)	-25	-25	-40	-35	
Reach	385	405	420	445	
Stack	561	566	601	610	

User → 135-155 150-165 160-175 >170

Ref. → D2213700 D2213900 D2224200 D2224500

TRAIL

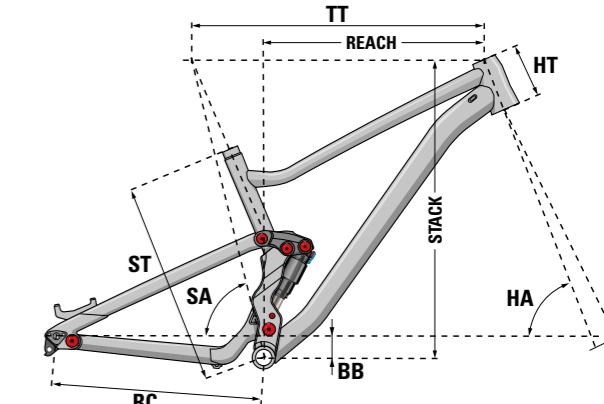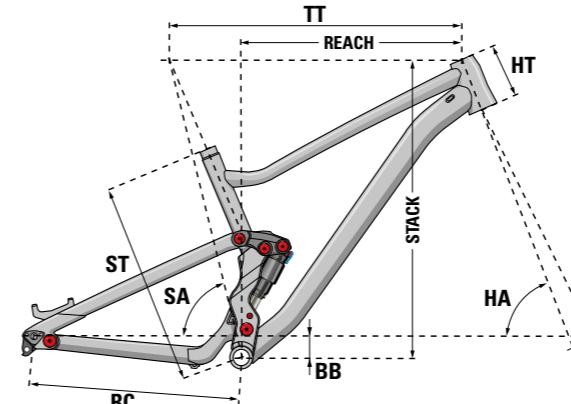

ZESTY TR 5.9

5
ALU
SUPREME 5
FRAME

1x12
SPEED

29"
WHEEL
SIZE

ZESTY TR 4.9

5
ALU
SUPREME 5
FRAME

1x12
SPEED

29"
WHEEL
SIZE



Cadre - Frame
NEW ZESTY TR SUPREME 5 120mm PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
FOX RYTHM 34 Float 2 Pos / Remote BOOST 120MM (29)

Amortisseur - Shock
FOX PERF FLOAT 3 POS lever, LV EVOL 16*45 TRUNNION

Dérailleur arrière - Rear Derailleur
SRAM GX EAGLE 12SPD

Pédalier - Crankset
SRAM X1 CARBON EAGLE BOOST148 DUB 12SPD. 170/32T (S), 175/32T (M, L, XL)

Boîtier Pédalier - Bottom Bracket
DUB PRESS FIT MTB 92

Cassette - Sprocket
SRAM PG 1210 12 Spd 11-50T

Chaîne - Chain
SRAM SX Eagle 12 Spd

Freins (avt-arr) - Brakes (front-rear)
SRAM GUIDE T

Disques - Rotors
SRAM CENTERLINE ROUNDED 200/180

Levier - Shiftlevers
SRAM NX EAGLE MATCHMAKER 12SPD

Jeu de direction - Headset
FSA ORBIT ZERO STACK

Cintre - Handlebar
LP 6061DB 760MM, 15MM RISE, 31.8 BAR BORE

Poignées - Grips
LAPIERRE DD34 Lock-on

Potence - Stem
LP FULL CNC 0° 45MM

Tige de selle - Seatpost
LP DROPPER by JD 80(S), 100(M), 130 (L, XL)

Selle - Saddle
Selle Royal VIVO

Moyeu avant - Front hub
LAPIERRE BY FASTACE DF813, BOOST 15x110, 32H

Moyeu arrière - Rear hub
LAPIERRE BY FASTACE DR813, 4 SEALED BEARINGS, BOOST 12x148, 32H

Jantes - Rims
MACH 1 MAXX 29" (25mm Wd) TUBELESS READY. 32H

Pneus - Tires
FRONT : MAXXIS ARDENT 29*2.40 EXO TR
REAR : FOREKASTER29*2.35 EXO TR

Pédales - Pedals
NW-91K

Accessoires - Accessories
TUBELESS VALVES

Cadre - Frame
NEW ZESTY TR SUPREME 5 120mm PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
NEW ROCKSHOX 35 Gold RL BOOST 120MM (29) W: REMOTE LO

Amortisseur - Shock
NEW ROCKSHOX DELUXE SELECT+ RL TRUNNION 165*45

Dérailleur arrière - Rear Derailleur
SRAM NX EAGLE 12SPD

Pédalier - Crankset
SRAM NX EAGLE BOOST148 DUB 12SPD. 170/32T (S,M), 32T 175/32T (M, L, XL)

Boîtier Pédalier - Bottom Bracket
DUB PRESS FIT MTB 92

Cassette - Sprocket
SRAM PG 1210 12 Spd 11-50T

Chaîne - Chain
SRAM SX Eagle 12 Spd

Freins (avt-arr) - Brakes (front-rear)
SRAM Level T

Disques - Rotors
SRAM CENTERLINE ROUNDED 200/180

Levier - Shiftlevers
SRAM NX EAGLE 12SPD

Jeu de direction - Headset
FSA ORBIT ZERO STACK

Cintre - Handlebar
LP 6061DB 760MM, 15MM RISE, 31.8 BAR BORE

Poignées - Grips
LAPIERRE DD34 Lock-on

Potence - Stem
LP FULL CNC 0° 45MM

Tige de selle - Seatpost
LP DROPPER by JD 80(S), 100(M), 130 (L, XL)

Selle - Saddle
Selle Royal VIVO

Moyeu avant - Front hub
LAPIERRE BY FASTACE DF813, BOOST 15x110, 32H

Moyeu arrière - Rear hub
LAPIERRE BY FASTACE DR813, 4 SEALED BEARINGS, BOOST 12x148, 32H

Jantes - Rims
MACH 1 MAXX 29" (25mm Wd) TUBELESS READY. 32H

Pneus - Tires
FRONT : MAXXIS ARDENT 29*2.40 EXO TR
REAR : FOREKASTER29*2.35 EXO TR

Pédales - Pedals
NW-91K

Accessoires - Accessories
TUBELESS VALVES

MTB

ZESTY TR 3.9

5
ALU
SUPREME 5
FRAME

1x12
SPEED

29"
WHEEL
SIZE

ZESTY TR 3.9 / 3.7 W

5
ALU
SUPREME 5
FRAME

1x12
SPEED

**27"
29"**
WHEEL
SIZE



● Cadre - Frame
NEW ZESTY TR SUPREME 5 120mm PRESSFIT, BOOST, METRIC, THRU AXLE

● Fourche - Fork
ROCKSHOX RECON RL BOOST 120MM (29) W/ Remote

● Amortisseur - Shock
NEW LAPPIERRE AF2 AIR TRUNNION METRIC REBOUND & LOCKOUT (165*45)

● Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12 Spd

● Pédalier -Crankset
SRAM SX Eagle DUB 12 Spd 170/32T (S,M) / 175/32T (L,XL)

● Boîtier Pédalier - Bottom Bracket
SRAM DUB PRESSFIT 92

● Cassette - Sprocket
SRAM PG 1210 12 Spd 11-50T

● Chaîne - Chain
SRAM SX Eagle 12 Spd

● Freins (avt-arr) - Brakes (front-rear)
NEW SHIMANO MT401

● Disques - Rotors
SHIMANO SM-RT30 180/180MM

● Levier - Shiftlevers
SRAM SX Eagle 12 Spd

● Jeu de direction - Headset
FSA ORBIT ZERO STACK

● Cintre - Handlebar
LP 6061DB 760MM, 15MM RISE, 31.8 BAR BORE

● Poignées - Grips
LP Single LOCK-ON by Hermans

● Potence - Stem
LP ALLOY 0° 45MM

● Tige de selle - Seatpost
LP DROPPER by JD 80(S), 100(M), 130 (L, XL)

● Selle - Saddle
Selle Royal VIVO

● Moyeu avant - Front hub
SHIMANO MT400, BOOST 15x110, CENTERLOCK, 32H

● Moyeu arrière - Rear hub
SHIMANO MT400, BOOST 12x148, CENTERLOCK, 32H

● Jantes - Rims
MACH 1 MAXX 29" (25mm Wd) TUBELESS READY, 32H

● Pneus - Tires
FRONT : MAXXIS ARDENT 29*2.40 EXO TR
REAR : FOREKASTER 29*2.35 EXO TR

● Pédales - Pedals
NW-91K

● Accessoires - Accessories
TUBELESS VALVES



W WOMEN SERIES

● Cadre - Frame
NEW ZESTY TR WOMEN SUPREME 5 120 mm PRESSFIT, BOOST, METRIC, THRU AXLE

● Fourche - Fork
ROCKSHOX RECON RL BOOST 120MM (29, 27.5) W/ Remote

● Amortisseur - Shock
NEW LAPPIERRE AF2 AIR TRUNNION METRIC REBOUND & LOCKOUT (165*45)

● Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12 Spd

● Pédalier -Crankset
SRAM SX Eagle DUB 12 Spd 165/30T, 170/30T

● Boîtier Pédalier - Bottom Bracket
SRAM DUB PRESSFIT 92

● Cassette - Sprocket
SRAM PG 1210 12 Spd 11-50T

● Chaîne - Chain
SRAM SX Eagle 12 Spd

● Freins (avt-arr) - Brakes (front-rear)
NEW SHIMANO MT401 - MT400

● Disques - Rotors
SHIMANO SM-RT30 180/180MM

● Levier - Shiftlevers
SRAM SX Eagle 12 Spd

● Jeu de direction - Headset
FSA ORBIT ZERO STACK

● Cintre - Handlebar
LP 6061DB 720MM, 15MM RISE, 31.8 BAR BORE

● Poignées - Grips
LAPIERRE DD34 Lock-on

● Potence - Stem
LP ALLOY 0° 35MM (M, L)

● Tige de selle - Seatpost
LP DROPPER by JD 80mm (XS, S), 100mm (M, L)

● Selle - Saddle
Selle Royal VIVO Women

● Moyeu avant - Front hub
SHIMANO MT400, BOOST 15x110, CENTERLOCK, 32H

● Moyeu arrière - Rear hub
SHIMANO MT400, BOOST 12x148, CENTERLOCK, 32H

● Jantes - Rims
MACH 1 MAXX 29" / 27.5" (25mm Wd) TUBELESS READY, 32H

● Pneus - Tires
FRONT : MAXXIS ARDENT 2.40WT EXO TR
REAR : FOREKASTER 2.35WT EXO TR "

● Pédales - Pedals
NW-91K

● Accessoires - Accessories
TUBELESS VALVES

MTB




X-CONTROL

OVERVIEW

GÉOMÉTRIE

Size	S	M	L	XL	Size	S	M	L
ST (cm)	40	44	48	53	ST (cm)	36	40	45
TT (mm)	565	590	610	635	TT (mm)	540	555	575
HA (°)	68	68	68	68	HA (°)	68.5	68.5	68.5
SA (°)	73.5	73.5	73.5	73.5	SA (°)	73	73	73
RC (mm)	435	435	435	435	RC (mm)	435	435	435
HT (mm)	110	120	130	150	HT (mm)	100	110	120
BB (mm)	-16	-16	-16	-16	BB (mm)	-16	-16	-16
Reach	396	418	435	455	Reach	367	380	397
Stack	572	581	590	609	Stack	565	574	583
User	150-170	168-178	176-186	>184	User	135-155	150-165	160-175
Ref.	D2104000	D2104400	D2104800	D2105300	Ref.	D2113600	D2114000	D2114500

TRAIL

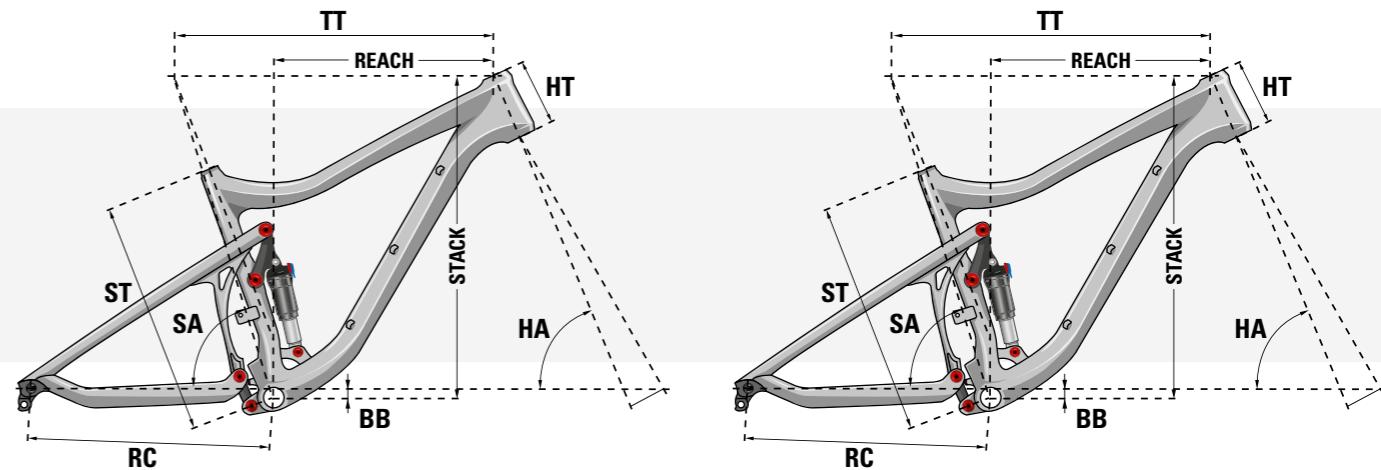

X-CONTROL 127

FPS +
SUSPENSION SYSTEM
6
ALU SUPREME 6 FRAME
3x9
SPEED
27.5"
WHEEL SIZE



X-CONTROL 127 W

FPS +
SUSPENSION SYSTEM
6
ALU SUPREME 6 FRAME
3x9
SPEED
27.5"
WHEEL SIZE



Cadre - Frame
X-CONTROL 27.5" SUPREME 6 ALLOY FPS+ 100mm travel, PRESSFIT, THRU AXLE 12x142

Fourche - Fork
ROCKSHOX 30 SILVER TURNKEY SOLO AIR 120mm

Amortisseur - Shock
LAPIERRE AIR WITH REBOUND ADJUST

Dérailleur arrière - Rear Derailleur
SHIMANO ALIVIO RDM4000 9s SHADOW DESIGN

Dérailleur avant - Front Derailleur
SHIMANO DEORE FDM611D DIRECT MOUNT

Pédalier - Crankset
SHIMANO ALIVIO M4050 40x30x22T 170mm(S), 175mm(M, L, XL)

Boîtier Pédalier - Bottom Bracket
SHIMANO SMBB7141A PRESSFIT

Cassette - Sprocket
SHIMANO HG201 9s 11-36T

Chaîne - Chain
SHIMANO HG53

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT200

Disques - Rotors
SHIMANO SMRT26 180mm / 160mm 6 BOLT TYPE

Levier - Shiftlevers
SHIMANO ALTUS SLM2010

Jeu de direction - Headset
FSA ORBIT 1.5ZS SC NO.57SC

Cintre - Handlebar
LAPIERRE 6061 ALLOY W: 720mm R: 15mm Ø: 31.8mm

Poignées - Grips
LAPIERRE DD34 Lock-on

Potence - Stem
LAPIERRE ALLOY 8° Ø: 31.8mm L: 60mm (S, M) / 70mm (L, XL)

Tige de selle - Seatpost
LAPIERRE ALLOY Ø: 31.6mm L: 350mm

Selle - Saddle
LAPIERRE by VELO

Moyeu avant - Front hub
FORMULA DC20LW 32H

Moyeu arrière - Rear hub
FORMULA DHT 142x12 32H

Jantes - Rims
MACH1 M630 32H 27.5"

Pneus - Tires
SCHWALBE 27.5X2.25 TOUGH TOM / 27.5X2.25 RAPID ROB

Pédales - Pedals
NW 91K steel cage

Cadre - Frame
X-CONTROL 27.5" SUPREME 6 ALLOY FPS+ 100mm travel, PRESSFIT, THRU AXLE 12x142

Fourche - Fork
ROCKSHOX 30 SILVER TURNKEY SOLO AIR 120mm

Amortisseur - Shock
LAPIERRE AIR WITH REBOUND ADJUST

Dérailleur arrière - Rear Derailleur
SHIMANO ALIVIO RDM4000 9s SHADOW DESIGN

Dérailleur avant - Front Derailleur
SHIMANO DEORE FDM611D DIRECT MOUNT

Pédalier - Crankset
SHIMANO ALIVIO M4050 40x30x22T 165mm(S), 170mm(M), 175mm(L)

Boîtier Pédalier - Bottom Bracket
SHIMANO SMBB7141A PRESSFIT

Cassette - Sprocket
SHIMANO HG201 9s 11-36T

Chaîne - Chain
SHIMANO HG53

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT200

Disques - Rotors
SHIMANO SMRT26 180mm / 160mm 6 BOLT TYPE

Levier - Shiftlevers
SHIMANO ALTUS SLM2010

Jeu de direction - Headset
FSA ORBIT 1.5ZS SC NO.57SC

Cintre - Handlebar
LAPIERRE 6061 ALLOY WOMEN W: 700mm R: 15mm Ø: 31.8mm

Poignées - Grips
LAPIERRE DD34 Lock-on

Potence - Stem
LAPIERRE ALLOY 8° Ø: 31.8mm L: 60mm

Tige de selle - Seatpost
LAPIERRE ALLOY Ø: 31.6mm L: 350mm

Selle - Saddle
LAPIERRE by VELO

Moyeu avant - Front hub
FORMULA DC20LW 32H

Moyeu arrière - Rear hub
FORMULA DHT 142x12 32H

Jantes - Rims
MACH1 M630 32H 27.5"

Pneus - Tires
SCHWALBE 27.5X2.25 TOUGH TOM / 27.5X2.25 RAPID ROB

Pédales - Pedals
NW 91K steel cage

MTB



XR


OVERVIEW

GÉOMÉTRIE


Size	S	M	L	XL
ST (cm)	39	43	47	51
TT (mm)	575	600	620	645
HA (°)	69	69	69	69
SA (°)	74.5	74.5	74.5	74.5
RC (mm)	441	441	441	441
HT (mm)	100	100	120	120
BB (mm)	-40	-40	-40	-40
Reach	412	437	452	477
Stack	587	587	605	605

User → 150-170 168-178 176-186 >184
Ref. → D20X3900 D20X4300 D20X4700 D20X5100

GEOMETRY

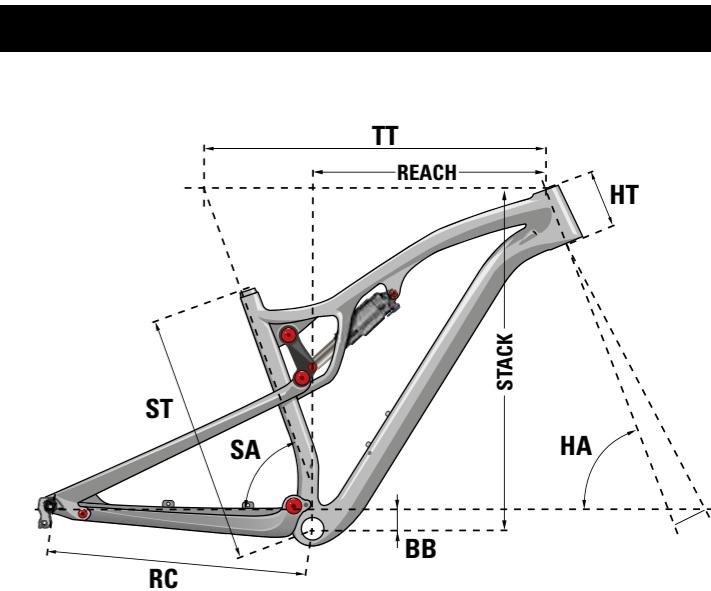

CROSS-COUNTRY

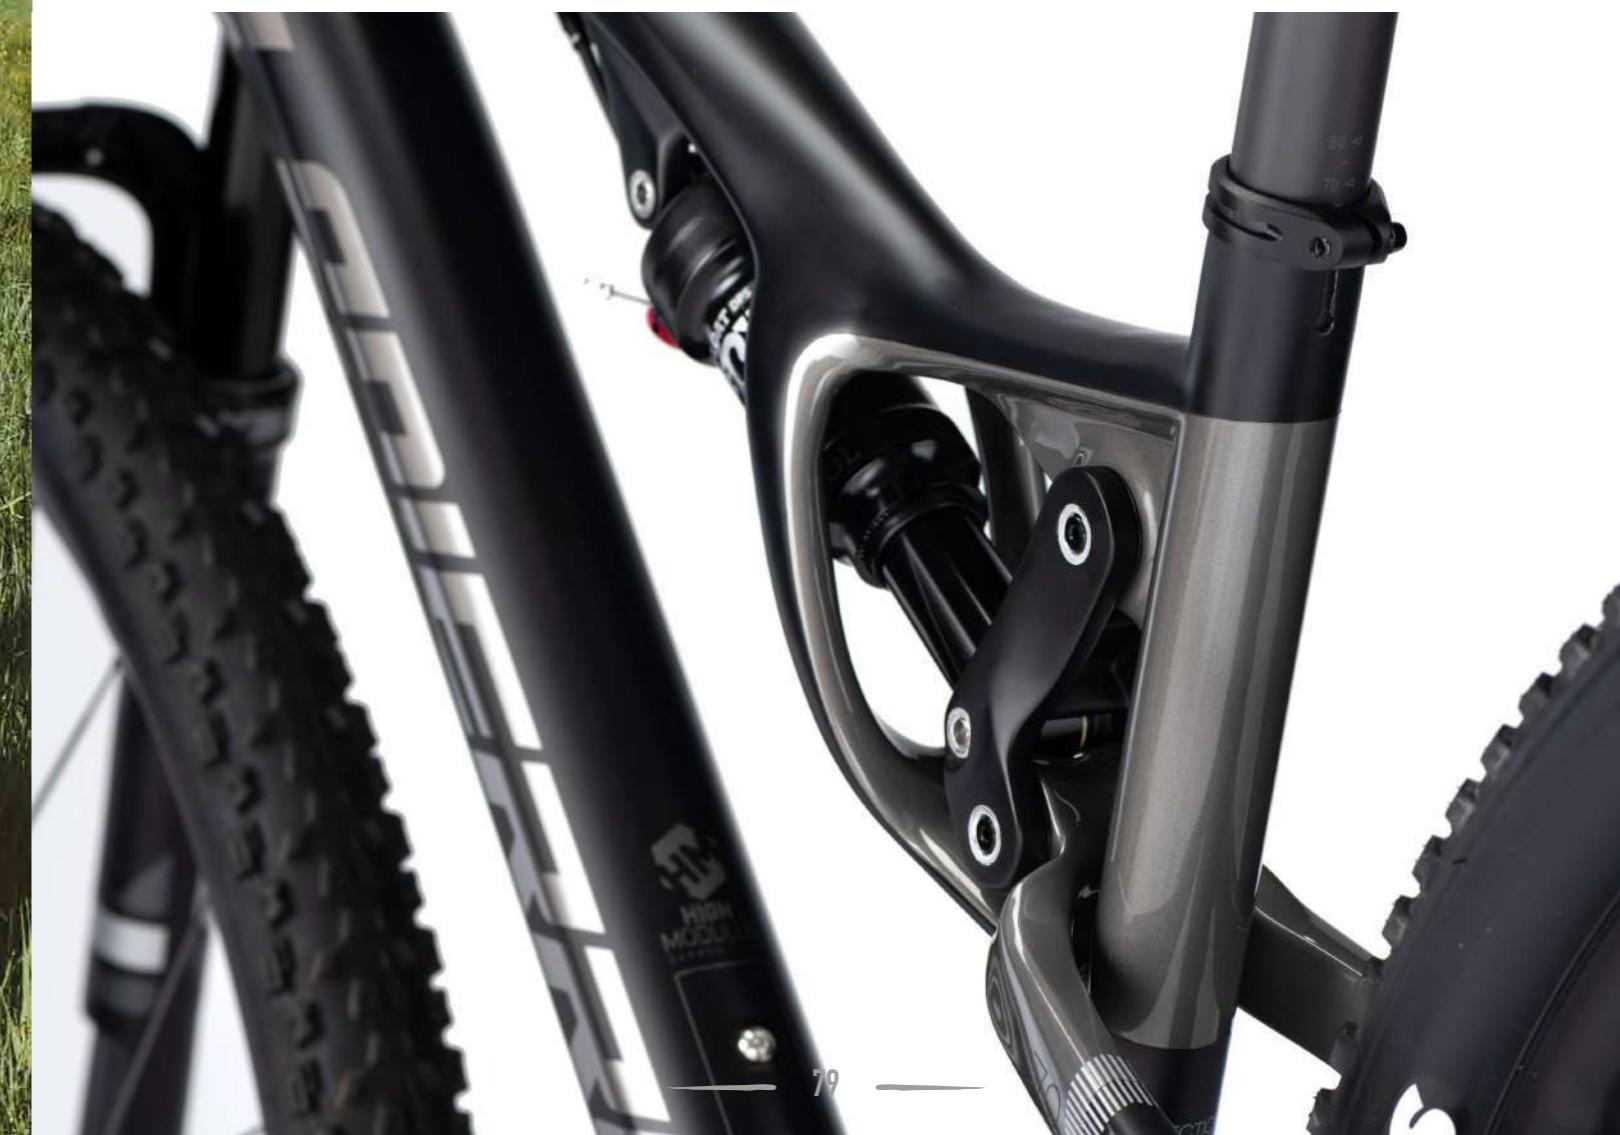


XR 9.9 LTD



- Cadre - Frame
XR 29" FULL CARBON ULTIMATE 100mm travel PRESSFIT, BOOST, METRIC THRU AXLE
- Fourche - Fork
FOX 32 STEP CAST FACTORY KASHIMA ORANGE 29" BOOST 100MM + 2 POSITION REMOTE
- Amortisseur - Shock
FOX FLOAT DPS FACTORY KASHIMA 2 POSITION REMOTE 190X40 (ORANGE DECALS)
- Dérailleur arrière - Rear Derailleur
SRAM XX1 EAGLE BLACK CARBON 12 Spd
- Pédalier - Crankset
SRAM XX1 EAGLE BLACK CARBON DUB DIRECT MOUNT 32T 170mm(S, 175mm (M,L,XL)
- Boîtier Pédalier - Bottom Bracket
SRAM DUB PRESSFIT 92
- Cassette - Sprocket
SRAM XG 1295 12s 10-50T
- Chaîne - Chain
SRAM X01 EAGLE
- Freins (avt-arr) - Brakes (front-rear)
SRAM LEVEL TLM
- Disques - Rotors
SRAM CENTERLINE 180mm / 160mm 6 BOLT TYPE

XR 7.9

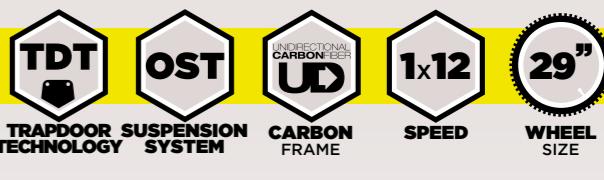

- Levier - Shiftlevers
SRAM X01 EAGLE
- Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC
- Fourche - Fork
FOX 32 STEP CAST PERFORMANCE 29" BOOST 100MM + 2 POSITION REMOTE
- Cintre - Handlebar
FSA SLK CARBON FLAT W: 740mm Ø: 31.8mm
- Poignées - Grips
FOAM GRIPS
- Potence - Stem
LAPIERRE 7050 ALLOY 3D FORGED 7° Ø: 31.8mm L: 60mm(S, M)/ 70mm (L, XL)
- Tige de selle - Seatpost
LAPIERRE CARBON Ø: 31.6mm L: 400mm
- Selle - Saddle
FIZIK TUNDRA M5
- Roues Complètes - Wheelset
LAPIERRE CARBON XC 29" BOOST XD DRIVER TLR
- Pneus - Tires
2.25 MAXXIS ARDENT / 2.20 IKON FOLDING BLACK 60TPI TLR
- Pédales - Pedals
NW 91K steel cage
- Accessoires - Accessories
TUBELESS FLAP & VALVES

- Cadre - Frame
XR 29" FULL CARBON 100mm travel PRESSFIT, BOOST, METRIC, THRU AXLE
- Fourche - Fork
FOX 32 STEP CAST PERFORMANCE 29" BOOST 100MM + 2 POSITION REMOTE
- Amortisseur - Shock
FOX FLOAT DPS PERFORMANCE ELITE 2 POSITION REMOTE 190X40
- Dérailleur arrière - Rear Derailleur
SHIMANO NEW K-RDM8100 XT 12 Spd
- Pédalier - Crankset
SHIMANO NEW XT FC-M8100 32T 170mm (S), 175mm (M, L, XL)
- Boîtier Pédalier - Bottom Bracket
SHIMANO PF BB
- Cassette - Sprocket
SHIMANO NEW SLX 10-51T 12 Spd
- Chaîne - Chain
SHIMANO NEW SLX 12 Spd
- Freins (avt-arr) - Brakes (front-rear)
SHIMANO NEW XT B-LM 8100
- Disques - Rotors
SHIMANO SMRT54 180mm / 160mm CENTER LOCK
- Levier - Shiftlevers
SHIMANO NEW SLX 1x12

- Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC
- Cintre - Handlebar
FSA SLK CARBON FLAT W: 740mm Ø: 31.8mm
- Poignées - Grips
FOAM GRIPS
- Potence - Stem
LAPIERRE 7050 ALLOY 3D FORGED 7° Ø: 31.8mm L: 60mm(S, M)/ 70mm (L, XL)
- Tige de selle - Seatpost
LAPIERRE CARBON Ø: 31.6mm L: 400mm
- Selle - Saddle
LAPIERRE by VELO
- Roues Complètes - Wheelset
MAVIC CROSSMAX ELITE UST 29" 15x110/ 12x148 Microspline / Centerlock
- Pneus - Tires
2.25 MAXXIS ARDENT / 2.20 IKON FOLDING BLACK 60TPI TLR
- Pédales - Pedals
NW 91K steel cage
- Accessoires - Accessories
TUBELESS VALVES



Cadre - Frame
XR 29" FULL CARBON 100mm travel PRESSFIT, BOOST, METRIC, THRU AXLE

Fourche - Fork
FOX 32 RYTHM 29" 32 RYTHM FLOAT : 2 Pos Remote, 15QR BOOST

Amortisseur - Shock
FOX Performance Elite FLOAT / 2 Pos Remote, LV EVOL

Dérailleur arrière - Rear Derailleur
SRAM SX EAGLE 12s

Pédalier - Crankset
SRAM SX EAGLE DUB 32T DIRECT MOUNT ST 170mm (S), 175mm (M, L, XL)

Boîtier Pédalier - Bottom Bracket
SRAM DUB PRESSFIT 92

Cassette - Sprocket
SRAM EAGLE PG1210 11-50 12spd

Chaîne - Chain
SRAM SX EAGLE

Freins (avt-arr) - Brakes (front-rear)
SRAM LEVEL

Disques - Rotors
SRAM G2 CLEANSWEEP 180mm / 160mm

Levier - Shiftlevers
SRAM SX EAGLE 12Spd

Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC

Cintre - Handlebar
LAPIERRE 6061 TOP FLAT W: 720mm Ø: 31.8mm

Poignées - Grips
FOAM GRIPS

Potence - Stem
LAPIERRE 7050 ALLOY 3D FORGED 7° Ø: 31.8mm L: 60mm(S, M)/ 70mm (L, XL)

Tige de selle - Seatpost
LAPIERRE 2014 ALLOY Ø: 31.6mm L: 400mm

Selle - Saddle
LAPIERRE by VELO

Moyeu avant - Front hub
LAPIERRE BY FASTACE DF813 . BOOST 15x110, 32H

Moyeu arrière - Rear hub
LAPIERRE BY FASTACE DR813. 4 SEALED BEARINGS, BOOST 12x148, 32H

Jantes - Rims
MAVIC XC 425 32H 29"

Pneus - Tires
2.25 MAXXIS ARDENT / 2.20 IKON FOLDING BLACK 60TPI TLR

Pédales - Pedals
NW 91K steel cage

Accessoires - Accessories
TUBELESS VALVES




PRO RACE SAT

GÉOMÉTRIE

Size	S	M	L	XL
ST (cm)	40	45	50	55
TT (mm)	575	600	625	650
HA (°)	69.5	69.5	69.5	69.5
SA (°)	73	73	73	73
RC (mm)	428	428	428	428
HT (mm)	90	95	105	120
BB (mm)	-65	-60	-60	-60
Reach	390	415	437	458
Stack	605	605	614	628
User	150-170	168-178	176-186	>184
Ref.	D15X4000	D15X4500	D15X5000	D15X5500

GEOMETRY

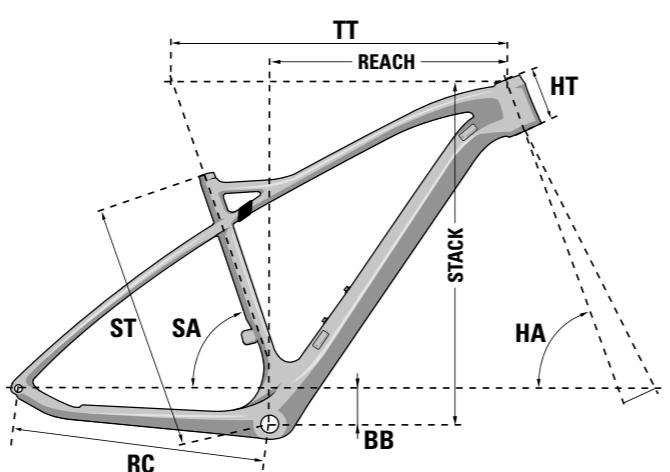

CROSS-COUNTRY



- Cadre - Frame
PRORACE SAT 29" CARBON ULTIMATE, BOOST, PRESSFIT, THRU AXLE 12x148
- Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC
- Fourche - Fork
FOX 32 SC "ORANGE" FACTORY KASHIMA 29" 100mm BOOST + 2 POSITION REMOTE
- Cintre - Handlebar
FSA SLK CARBON FLAT W: 740mm Ø: 31.8mm
- Poignées - Grips
PRE FOAM GRIPS
- Dérailleur arrière - Rear Derailleur
SRAM XX1 EAGLE AXS 12s
- Potence - Stem
LAPIERRE 7050 ALLOY 3D FORGED 7° Ø: 31.8mm L: 70mm(S,M,L)/ 90mm (XL)
- Tige de selle - Seatpost
LAPIERRE CARBON Ø: 27.2mm L: 400mm
- Selle - Saddle
FIZIK TUNDRA M5 BLACK
- Roues Complètes - Wheelset
LAPIERRE CARBON XC 29" BOOST XD DRIVER
- Pneus - Tires
29X2.25 MAXXIS ARDENT / 29X2.20 IKON FOLDING BLACK 60TPI
- Pédales - Pedals
NW 91K steel cage
- Accessoires - Accessories
CHAINGUIDE LAPIERRE
- Levier - Shiftevers
SRAM XX1 EAGLE AXS 12s

PRORACE SAT 8.9



Cadre - Frame
PRORACE SAT 29" CARBON SL, BOOST, PRESSFIT, THRU AXLE 12x148

Fourche - Fork
FOX 32 STEP CAST FACTORY 15mm 29" 100mm BOOST + 2 POSITION REMOTE

Dérailleur arrière - Rear Derailleur
SRAM X01 Eagle 12 Spd

Pédalier - Crankset
SRAM X1 CARBON Eagle DUB 32T 170mm (S), 175mm (M, L, XL)

Boîtier Pédalier - Bottom Bracket
SRAM DUB PRESSFIT 92

Cassette - Sprocket
SRAM XG1275 EAGLE 10-50

Chaîne - Chain
SRAM NX Eagle 12spd

Freins (avt-arr) - Brakes (front-rear)
SHIMANO NEW XT B-LM 8100

Disques - Rotors
SHIMANO SMRT56 180mm / 160mm

Levier - Shiftlevers
SRAM GX Eagle 12 Spd

Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC

Cintre - Handlebar
FSA SLK CARBON FLAT W: 740mm Ø: 31.8mm

Poignées - Grips
PRE FOAM GRIPS

Potence - Stem
LAPIERRE 7050 ALLOY 3D FORGED 7° Ø: 31.8mm L: 70mm(S,M, L)/ 90mm (XL)

Tige de selle - Seatpost
LAPIERRE ALLOY FORGED Ø: 27.2mm L: 400mm

Selle - Saddle
FIZIK TAIGA BLACK

Roues Complètes - Wheelset
LAPIERRE CARBON XC 29" BOOST XD DRIVER

Pneus - Tires
29X2.25 MAXXIS ARDENT / 29X2.20 IKON FOLDING BLACK 60TPI TLR

Pédales - Pedals
NW 91K steel cage

Accessoires - Accessories
CHAINGUIDE LAPIERRE

PRORACE SAT 7.9



Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC

Cintre - Handlebar
LAPIERRE 6061 TOP FLAT W: 720mm Ø: 31.8mm

Poignées - Grips
PRE FOAM GRIPS

Potence - Stem
LAPIERRE 7050 ALLOY 3D FORGED 7° Ø: 31.8mm L: 70mm(S, M, L)/ 90mm (XL)

Tige de selle - Seatpost
LAPIERRE ALLOY FORGED Ø: 27.2mm L: 400mm

Selle - Saddle
LAPIERRE by VELO

Roues Complètes - Wheelset
MAVIC CROSSMAX UST BOOST (Microspine/ Centerlock)

Pneus - Tires
29X2.25 MAXXIS ARDENT / 29X2.20 IKON FOLDING BLACK 60TPI TLR

Pédales - Pedals
NW 91K steel cage

Accessoires - Accessories
CHAINGUIDE LAPIERRE

PRORACE SAT 6.9



✓ Cadre - Frame
PRORACE SAT 29" CARBON, BOOST, PRESSFIT, THRU AXLE 12x148

✓ Fourche - Fork
FOX 32 FLOAT SC PERF 15mm 100mm BOOST + REMOTE

✓ Dérailleur arrière - Rear Derailleur
SRAM GX EAGLE 12s

✓ Pédalier - Crankset
SRAM NX EAGLE DUB 32T DIRECT MOUNT ALLOY
170mm (S), 175mm (M, L, XL)

✓ Boîtier Pédalier - Bottom Bracket
SRAM DUB PRESSFIT 92

✓ Cassette - Sprocket
SRAM EAGLE PG1210 11-50 12spd

✓ Chaîne - Chain
SRAM SX EAGLE

✓ Freins (avt-arr) - Brakes (front-rear)
SRAM LEVEL BLACK

✓ Disques - Rotors
SRAM G2 CLEANSWEEP 180mm / 160mm

✓ Levier - Shiftlevers
SRAM SX EAGLE 1x12

✓ Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC

PRORACE SAT 5.9



✓ Cadre - Frame
PRORACE SAT 29" CARBON, BOOST, PRESSFIT, THRU AXLE 12x148

✓ Fourche - Fork
ROCKSHOX RECON RL 15mm SOLO AIR 100mm BOOST + ONE LOC

✓ Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12spd

✓ Pédalier - Crankset
SRAM SX Eagle 12spd 30T 170mm (S), 175mm (M, L, XL)

✓ Boîtier Pédalier - Bottom Bracket
SRAM DUB PF MTB 92

✓ Cassette - Sprocket
SRAM Eagle PG1210 11-50 12spd

✓ Chaîne - Chain
SRAM SX Eagle 12spd

✓ Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT401 INTERNAL ROUTING WITH J-KIT

✓ Disques - Rotors
SHIMANO SMRT30 180mm / 160mm CENTER LOCK

✓ Levier - Shiftlevers
SRAM SX Eagle 12spd

✓ Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC

✓ Cadre - Handlebar
LAPIERRE 6061 TOP FLAT W: 720mm Ø: 31.8mm

✓ Poignées - Grips
PRE FOAM GRIPS

✓ Potence - Stem
LAPIERRE ALLOY 3D FORGED 7° Ø: 31.8mm L: 70mm(S, M, L) / 90mm (XL)

✓ Tige de selle - Seatpost
LAPIERRE ALLOY FORGED Ø: 27.2mm L: 400mm

✓ Selle - Saddle
LAPIERRE by VÉLO

✓ Moyeu avant - Front hub
SHIMANO MT400 THRU AXLE

✓ Moyeu arrière - Rear hub
SHIMANO MT400 THRU AXLE

✓ Jantes - Rims
MAVIC XC425 DISC 29"

✓ Pneus - Tires
MAXXIS ARDENT 29x2.25 FOLDING 60 TPI TLR EXO / IKON 29x2.2 FOLDING 60 TPI TLR EXO

✓ Pédales - Pedals
NW 91K steel cage

✓ Accessoires - Accessories
CHAINGUIDE LAPIERRE

MTB



PRO RACE

90

Ref.

PRORACE

GÉOMÉTRIE

Size	XS	S	M	L	XL		Size	S	M	L
ST (cm)	35	40	44	48	53		ST (cm)	35	40	45
TT (mm)	550	575	600	625	650		TT (mm)	550	580	610
HA (°)	69	69.5	69.5	69.5	69.5		HA (°)	69	69.5	69.5
SA (°)	73	73	73	73	73		SA (°)	73	73	73
RC (mm)	428	428	428	428	428		RC (mm)	428	428	428
HT (mm)	90	90	90	105	120		HT (mm)	90	90	100
BB (mm)	-65	-65	-60	-60	-60		BB (mm)	-65	-65	-60
Reach	371	390	416	437	458		Reach	371	401	424
Stack	584	605	600	614	628		Stack	584	587	610



User → < 150 150-170 168-178 176-186 >184

Ref. → D14X3500 D14X4000 D14X4400 D14X4800 D14X5300

User → 135-155 150-165 160-175

Ref. → D1413500 D1414000 D1414500

CROSS-COUNTRY

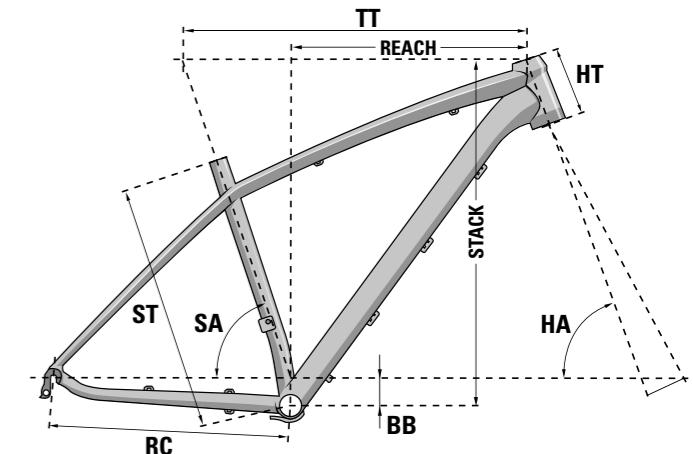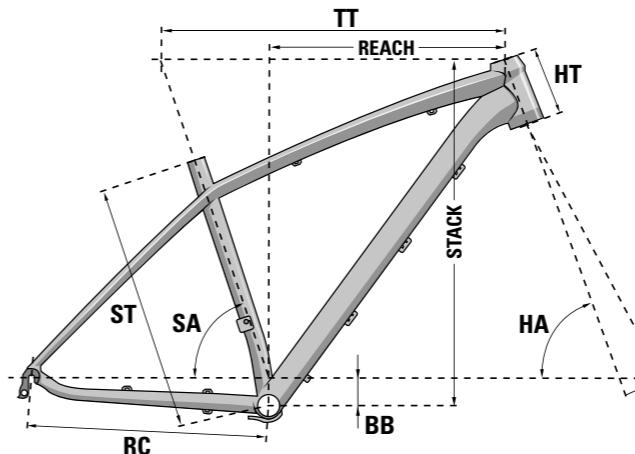

WOMEN SERIES

Size	S	M	L
ST (cm)	35	40	45
TT (mm)	550	580	610
HA (°)	69	69.5	69.5
SA (°)	73	73	73
RC (mm)	428	428	428
HT (mm)	90	90	100
BB (mm)	-65	-65	-60
Reach	371	401	424
Stack	584	587	610

PRORACE 4.9

5
ALU SUPREME 5
FRAME

1x12
SPEED

29"
WHEEL
SIZE

PRORACE 3.9

5
ALU SUPREME 5
FRAME

1x12
SPEED

29"
WHEEL
SIZE



Cadre - Frame
PRORACE 29" SUPREME 5 ALLOY DISC, BOOST, PRESSFIT, THRU AXLE 12x148

Fourche - Fork
FOX 32 RYTHM FLOAT 100mm BOOST + REMOTE

Dérailleur arrière - Rear Derailleur
SRAM NX EAGLE 12 spd

Pédalier - Crankset
SRAM SX EAGLE DUB 32T 170mm (XS, S), 175mm (M, L, XL)

Boîtier Pédalier - Bottom Bracket
SRAM DUB

Cassette - Sprocket
SRAM PG1210 EAGLE 11-50T 12 spd

Chaîne - Chain
SRAM SX EAGLE 12spd

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT401 WITH J-KIT

Disques - Rotors
SHIMANO SMRT26 180mm / 160mm 6 BOLT TYPE

Levier - Shiftlevers
SRAM NX EAGLE 1x12

Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO57SC

Cintre - Handlebar
LAPIERRE 6061 TOP FLAT W: 720mm Ø: 31.8mm

Poignées - Grips
PRE FOAM GRIPS

Potence - Stem
LAPIERRE ALLOY 3D FORGED 7° Ø: 31.8mm L: 60mm(XS, S) / 70mm (M, L) / 80mm (XL)

Tige de selle - Seatpost
LAPIERRE ALLOY FORGED Ø: 27.2mm L: 400mm

Selle - Saddle
LAPIERRE by VELO

Moyeu avant - Front hub
FASTACE DF813

Moyeu arrière - Rear hub
FASTACE DR813

Jantes - Rims
RODI EXCALIBUR XC2 622x19C 32H TAPERED SPOKES

Pneus - Tires
29X2.25 MAXXIS ARDENT / 29X2.20 IKON FOLDING SKINWALL 60TPI

Pédales - Pedals
NW 91K steel cage



Cadre - Frame
PRORACE 29" SUPREME 5 ALLOY DISC, BOOST, PRESSFIT, THRU AXLE 12x148

Fourche - Fork
ROCKSHOX JUDY GOLD RL 15mm SOLO AIR 100mm BOOST + ONELOC

Dérailleur arrière - Rear Derailleur
SHIMANO SLX 12spd

Pédalier - Crankset
SHIMANO FC-MT610 30T 170mm (XS,S), 175mm (M, L, XL)

Boîtier Pédalier - Bottom Bracket
SHIMANO BBMT800 PRESSFIT

Cassette - Sprocket
SHIMANO 10-51T 12spd

Chaîne - Chain
SHIMANO SLX 12 Spd

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT401 WITH J-KIT

Disques - Rotors
SHIMANO SMRT30 180mm / 160mm 6 BOLT TYPE

Levier - Shiftlevers
SHIMANO SLX 12Spd

Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO57SC

Cintre - Handlebar
LAPIERRE 6061 TOP FLAT W: 720mm Ø: 31.8mm

Poignées - Grips
PRE FOAM GRIPS

Potence - Stem
LAPIERRE ALLOY 3D FORGED 7° Ø: 31.8mm L: 60mm(XS, S) / 70mm (M, L) / 80mm (XL)

Tige de selle - Seatpost
LAPIERRE ALLOY Ø: 27.2mm L: 400mm

Selle - Saddle
LAPIERRE by VELO

Moyeu avant - Front hub
SHIMANO HB-MT400-B - CENTER LOCK

Moyeu arrière - Rear hub
SHIMANO FH-MT510-B - CENTER LOCK

Jantes - Rims
RODI EXCALIBUR XC2 622x19C 32H TAPERED SPOKES (I)

Pneus - Tires
29X2.25 MAXXIS ARDENT / 29X2.20 IKON FOLDING SKINWALL 60TPI

Pédales - Pedals
NW 91K steel cage

OVERSEAS : (1) ALEX RIMS TD19 /

MTB

PRORACE 2.9

5
ALU SUPREME 5
FRAME

1x12
SPEED

29"
WHEEL
SIZE

PRORACE 2.9 W

5
ALU SUPREME 5
FRAME

1x12
SPEED

29"
WHEEL
SIZE



Cadre - Frame
PRORACE 29" SUPREME 5 ALLOY DISC, BOOST, PRESSFIT, THRU AXLE 12x148

Fourche - Fork
ROCKSHOX JUDY SILVER TK REMOTE QR15mm SOLO AIR 100mm BOOST

Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12spd

Pédalier - Crankset
SRAM SX Eagle DUB 32T 170mm (XS, S), 175mm (M, L, XL)

Boîtier Pédalier - Bottom Bracket
SRAM PF MTB92 DUB

Cassette - Sprocket
SRAM CS PG1210 EAGLE 11-50T

Chaîne - Chain
SRAM SX Eagle 12spd

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT200 WITH J-KIT

Disques - Rotors
SHIMANO SMRT30 180mm / 160mm CENTER LOCK

Levier - Shiftlevers
SRAM SX Eagle 12Spd

Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC

Cintre - Handlebar
LAPIERRE 6061 TOP FLAT W: 720mm Ø: 31.8mm

Poignées - Grips
LAPIERRE by HERRMANS DD30B

Potence - Stem
LAPIERRE ALLOY 3D FORGED 7° Ø: 31.8mm L: 60mm(XS, S) / 70mm (M, L) / 80mm (XL)

Tige de selle - Seatpost
LAPIERRE ALLOY Ø: 27.2mm L: 400mm

Selle - Saddle
LAPIERRE by VELO

Moyeu avant - Front hub
SHIMANO MT400

Moyeu arrière - Rear hub
SHIMANO MT400

Jantes - Rims
RODI EXCALIBUR XC2 622x19C 32H TAPERED SPOKES (1)

Pneus - Tires
TOUGH TOM K-Guard 29X2.25 (FRONT) RAPID ROB K-Guard 29X2.25 (REAR) (2)

Pédales - Pedals
NW 91K steel cage

OVERSEAS : (1) ALEX RIMS TD19 /
(2) MAXXIS ARDENT 29x2.25 60 TPI FOLDING, IKON 29x2.2 60 TPI FOLDING (REAR)

WOMEN SERIES



Cadre - Frame
PRORACE 29" WOMAN SUPREME 5 ALLOY DISC, BOOST, PRESSFIT, THRU AXLE 12x148

Fourche - Fork
ROCKSHOX JUDY SILVER TK REMOTE QR15mm SOLO AIR 100mm BOOST

Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12spd

Pédalier - Crankset
SRAM SX Eagle DUB 32T 170mm (S,M,L)

Boîtier Pédalier - Bottom Bracket
SRAM PF MTB92 DUB

Cassette - Sprocket
SRAM CS PG1210 EAGLE 11-50T

Chaîne - Chain
SRAM SX Eagle 12spd

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT200 WITH J-KIT

Disques - Rotors
SHIMANO SMRT30 180mm / 160mm CENTER LOCK

Levier - Shiftlevers
SRAM SX Eagle 12Spd

Jeu de direction - Headset
FSA ORBIT 1.5Z SC NO.57SC

Cintre - Handlebar
LAPIERRE 6061 TOP FLAT W: 720mm Ø: 31.8mm

Poignées - Grips
LAPIERRE by HERRMANS DD30B

Potence - Stem
LAPIERRE ALLOY 3D FORGED 7° Ø: 31.8mm L: 60mm(S, M, L)

Tige de selle - Seatpost
LAPIERRE ALLOY Ø: 27.2mm L: 400mm

Selle - Saddle
LAPIERRE WOMAN by VELO

Moyeu avant - Front hub
SHIMANO MT400

Moyeu arrière - Rear hub
SHIMANO MT400

Jantes - Rims
RODI EXCALIBUR XC2 622x19C 32H TAPERED SPOKES (1)

Pneus - Tires
TOUGH TOM K-Guard 29X2.25 / RAPID ROB K-Guard 29X2.25 (2)

Pédales - Pedals
NW 91K steel cage

OVERSEAS : (1) ALEX RIMS TD19 /
(2) MAXXIS ARDENT 29x2.25 60 TPI FOLDING, IKON 29x2.2 60 TPI FOLDING (REAR)



EDGE


GÉOMÉTRIE

Size	S	M	L
ST (cm)	35	40	45
TT (mm)	550	580	610
HA (°)	68	68	68
SA (°)	73.5	73.5	73.5
RC (mm)	425	425	425
HT (mm)	115	125	135
BB (mm)	-50	-50	-45
Reach	372	399	428
Stack	602	611	615

User → 135-155 150-165 160-175

Ref. → D12X3500 D12X4000 D12X4500

GEOMETRY

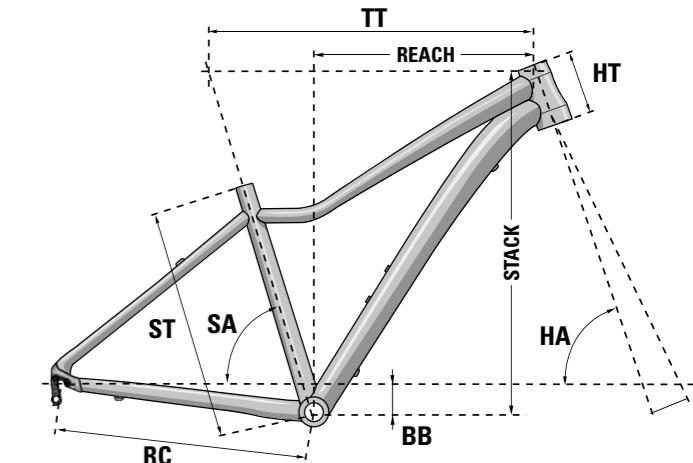

WOMEN SERIES

SPORT



GÉOMÉTRIE

27.5"


29"

GEOMETRY

Size	XS	S	M	L	XL	S	M	L	XL
ST (cm)	36	40	44	48	53	40	44	48	53
TT (mm)	540	565	590	615	640	565	590	615	640
HA (°)	68	68	68	68	68	69.5	69.5	69.5	69.5
SA (°)	73.5	73.5	73.5	73.5	73.5	73	73	73	73
RC (mm)	425	425	425	425	425	444	444	444	444
HT (mm)	100	110	120	130	140	95	95	110	125
BB (mm)	-50	-50	-45	-45	-45	-65	-60	-60	-60
Reach	366	388	412	434	456	375	401	422	443
Stack	588	597	601	611	620	622	617	631	645

User ➔ XS 145-155 S 150-170 M 168-178 L 176-186 XL >184

Ref. ➔ D12X3600 D12X4000 D12X4400 D12X4800 D12X5300

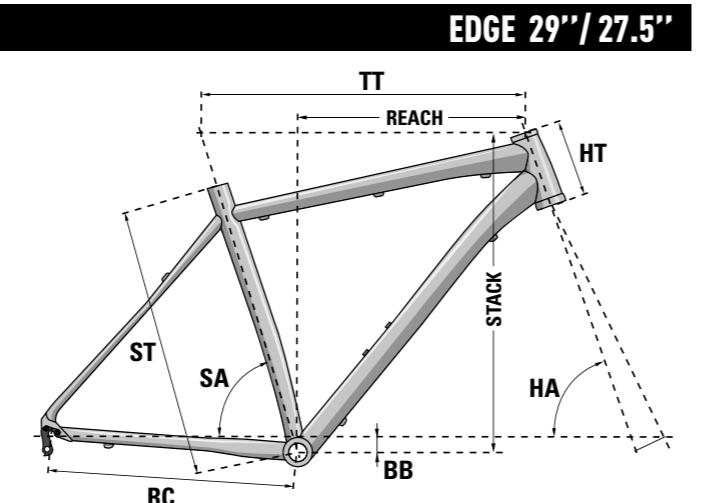


Size XS S M L XL

Size	XS	S	M	L	XL
ST (cm)	36	40	44	48	53
TT (mm)	540	565	590	615	640
HA (°)	68	68	68	68	68
SA (°)	73.5	73.5	73.5	73.5	73.5
RC (mm)	425	425	425	425	425
HT (mm)	100	110	120	130	140
BB (mm)	-50	-50	-45	-45	-45
Reach	368	390	414	436	458
Stack	581	591	595	604	613

User ➔ 145-155 150-170 168-178 176-186 >184

Ref. ➔ D12X3600 D12X4000 D12X4400 D12X4800 D12X5300

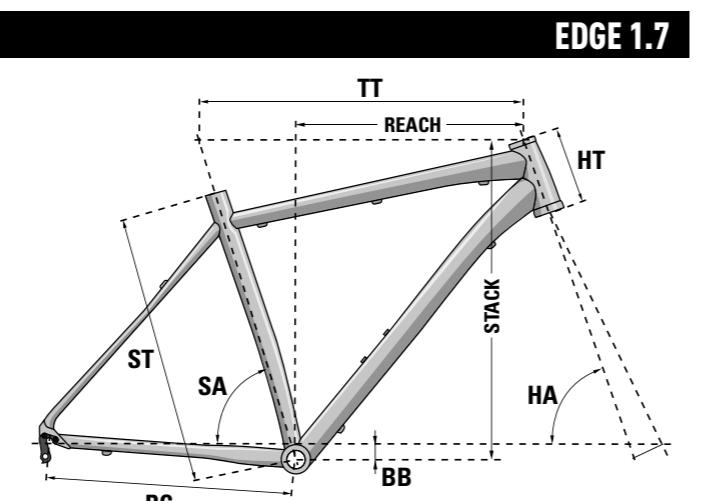

- EDGE 29'' / 27.5'' SUPREME 5 ALLOY DISC INTERNAL ROUTING
- Cadre - Frame
EDGE 29'' / 27.5'' SUPREME 5 ALLOY DISC INTERNAL ROUTING
- Cintre - Handlebar
29'': XLC 6061 TOP FLAT W: 720mm Ø: 31.8mm
27.5'': XLC 6061 ALLOY W: 720mm R: 15mm Ø: 31.8mm
- Fourche - Fork
SUNTOUR RAIDON XC RL R 29'' / 27.5'' 100mm with Remote LO
- Poignées - Grips
LAPIERRE by HERRMANS DD30B
- Dérailleur arrière - Rear Derailleur
SRAM SX Eagle 12 Spd
- Potence - Stem
XLC ALLOY Ø: 31.8mm L: 60mm(XS, S, M, L) / 80mm (XL)
- Pédalier - Crankset
SRAM SX Eagle Powerspline 32T 170mm (XS, S) / 175mm (M, L, XL)
- Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm
- Boîtier Pédalier - Bottom Bracket
SRAM Powerspline BB 113/68
- Selle - Saddle
XLC by DDK
- Cassette - Sprocket
SRAM PG1210 EAGLE 11-50T 12 spd
- Chaîne - Chain
SRAM SX 12 Spd
- Moyeu avant - Front hub
FORMULA DC20LW 32H
- Moyeu arrière - Rear hub
FORMULA DC22LW 32H
- Jantes - Rims
RODI FW DOUBLE WALL 29X19C / 27.5X19C DISC TAPERED SPOKES
- Pneus - Tires
29'': TOUGH TOM K-Guard 29X2.25 / RAPID ROB K-Guard 29X2.10
27.5'': TOUGH TOM K-Guard 27.5X2.25 / RAPID ROB K-Guard 27.5X2.10
- Pédales - Pedals
NW 91K steel cage
- Jeu de direction - Headset
FSA NO10, ED 1-1/8" + XLC logo

EDGE 7.9 / 7.7



Cadre - Frame
EDGE 29" / 27.5" SUPREME 5 ALLOY DISC INTERNAL ROUTING

Fourche - Fork
SUNTOUR XCR-RL-R-29" / 27.5" 100mm WITH REMOTE

Dérailleur arrière - Rear Derailleur
SHIMANO DEORE RD-M781 XT, 10s SHADOW DESIGN

Dérailleur avant - Front Derailleur
SHIMANO Deore 2x10S

Pédalier - Crankset
SHIMANO FCMT500-2 36x26 170mm (XS, S) / 175mm (M, L, XL)

Boîtier Pédalier - Bottom Bracket
SHIMANO included w/cranksets

Cassette - Sprocket
SUNRACE CSMS2 10s 11-36T

Chaîne - Chain
YBN 10s-SPEED

Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT200

Disques - Rotors
SHIMANO SMRT30 180mm / 160mm CENTERLOCK

Levier - Shiftlevers
SHIMANO DEORE SLM6000 2x10-SPEED

OVERSEAS 29" : Alex rims / Maxxis Tyre

EDGE 5.9 / 5.7



Jeu de direction - Headset
FSA NO.10, ED 1-1/8" + XLC logo

Cintre - Handlebar
29" : XLC 6061 TOP FLAT W: 720mm Ø: 31.8mm
27.5" : XLC 6061 ALLOY W: 720mm R: 15mm Ø: 31.8mm

Poignées - Grips
LAPIERRE by HERRMANS DD30B

Potence - Stem
XLC ALLOY 7° Ø: 31.8mm L: 60mm(XS, S, M, L) / 80mm (XL)

Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm

Selle - Saddle
XLC by DDK

Moyeu avant - Front hub
SHIMANO HBTX505 32H CENTER LOCK

Moyeu arrière - Rear hub
SHIMANO FHTX505 32H CENTER LOCK

Jantes - Rims
RODI FW DOUBLE WALL 622X19C / 27.5X19C DISC TAPERED SPOKES (1)

Pneus - Tires
29" : TOUGH TOM K-Guard 29X2.25 / RAPID ROB K-Guard 29X2.10 (2)
27.5" : TOUGH TOM K-Guard 27.5X2.25 / RAPID ROB K-Guard 27.5X2.10

Pédales - Pedals
NW 91K steel cage

Jeu de direction - Headset
FSA NO.10, ED 1-1/8" + XLC logo

Cintre - Handlebar
29" : XLC 6061 TOP FLAT W: 720mm Ø: 31.8mm
27.5" : XLC 6061 ALLOY W: 720mm R: 15mm Ø: 31.8mm

Poignées - Grips
LAPIERRE by HERRMANS DD30B

Potence - Stem
XLC ALLOY 7° Ø: 31.8mm L: 60mm(XS, S, M, L) / 80mm (XL)

Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm

Selle - Saddle
XLC by DDK

Moyeu avant - Front hub
SHIMANO HBTX505 32H CENTER LOCK

Moyeu arrière - Rear hub
SHIMANO FHTX505 32H CENTER LOCK

Jantes - Rims
RODI FW DOUBLE WALL 622X19C / 27.5X19C DISC TAPERED SPOKES

Pneus - Tires
29" : TOUGH TOM K-Guard 29X2.25 / RAPID ROB K-Guard 29X2.10
27.5" : TOUGH TOM K-Guard 27.5X2.25 / RAPID ROB K-Guard 27.5X2.10

Pédales - Pedals
NW 91K steel cage

OVERSEAS 29" : Alex rims - Maxxis Tyre

MTB

D131 **27.5"**
D132 **29"**

27.5" D128
29" D130

EDGE 5.7 W



W WOMEN SERIES



- Cadre - Frame
EDGE 27.5" WOMEN SUPREME 5 ALLOY DISC INTERNAL ROUTING
- Fourche - Fork
SUNTOUR XCR-RL-R-27.5" 100mm WITH REMOTE LO
- Dérailleur arrière - Rear Derailleur
SHIMANO DEORE RDM592 9s SHADOW DESIGN
- Dérailleur avant - Front Derailleur
SHIMANO ALTUS FDM2020 2BY
- Pédalier -Crankset
SHIMANO FCMT210 36x22 170mm (S, M) / 175mm (L)
- Boîtier Pédalier - Bottom Bracket
SHIMANO included w/crank
- Cassette - Sprocket
SUNRACE CSM 90 9s 11-36T
- Chaîne - Chain
YBN 9-SPEED
- Freins (avt-arr) - Brakes (front-rear)
SHIMANO MT200
- Disques - Rotors
SHIMANO SMRT30 180mm / 160mm CENTERLOCK
- Levier - Shiftlevers
SHIMANO ALTUS SLM2010 2x9-SPEED

EDGE 3.9 / 3.7



- Jeu de direction - Headset
FSA NO.10, ED 1-1/8" + XLC logo
- Cintre - Handlebar
XLC 6061 ALLOY W: 700mm R: 15mm Ø: 31.8mm
- Poignées - Grips
LAPIERRE by HERRMANS DD30B
- Potence - Stem
XLC ALLOY 7° Ø: 31.8mm L: 60mm(XS, S, M, L) / 80mm (XL)
- Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm
- Selle - Saddle
XLC by DDK
- Moyeu avant - Front hub
SHIMANO HBTX505 32H CENTER LOCK
- Moyeu arrière - Rear hub
SHIMANO FHTX505 32H CENTER LOCK
- Jantes - Rims
RODI FW DOUBLE WALL 29X19C / 27.5X19C DISC (1)
- Pneus - Tires
TOUGH TOM K-Guard 29X2.25 / RAPID ROB K-Guard 29X2.10 (2)
TOUGH TOM K-Guard 27.5X2.25 / RAPID ROB K-Guard 27.5X2.10
- Pédales - Pedals
NW 91K steel cage
- Cadre - Frame
EDGE 29" / 27.5" SUPREME 5 ALLOY DISC INTERNAL ROUTING
- Fourche - Fork
SUNTOUR XCM-LO-PM-29" / 27.5" 100mm
- Dérailleur arrière - Rear Derailleur
SHIMANO ALTUS RDM2000 9s SHADOW DESIGN
- Dérailleur avant - Front Derailleur
SHIMANO ALTUS FDM200
- Pédalier -Crankset
SHIMANO FCMT100 40x30x22 170mm (XS, S) / 175mm (M, L, XL)
- Boîtier Pédalier - Bottom Bracket
SQUARE CH 52 127MM
- Cassette - Sprocket
SUNRACE CSM90 9s 11-36T
- Chaîne - Chain
YBN 9-SPEED
- Freins (avt-arr) - Brakes (front-rear)
SHIMANO HYDRAULIC MT200
- Disques - Rotors
SHIMANO SMRT10 160mm / 160mm CENTERLOCK
- Levier - Shiftlevers
COMBO SHIMANO STEF505 3x9s/ hydraulic brake lever
- Jeu de direction - Headset
FSA NO.10, ED 1-1/8" + XLC logo

OVERSEAS : (1) 29 "/ 27,5 " Alex rims
(2) 29" : MAXXIS tyres

EDGE 3.7 W



W WOMEN SERIES

- Cadre - Frame
EDGE 27.5" WOMAN SUPREME 5 ALLOY DISC INTERNAL ROUTING
- Fourche - Fork
SUNTOUR XCM-LO-PM-27.5" 100mm
- Dérailleur arrière - Rear Derailleur
SHIMANO ALTUS RDM2000 9s SHADOW DESIGN
- Dérailleur avant - Front Derailleur
SHIMANO ALTUS FDM2000
- Pédalier - Crankset
SHIMANO FCMT100 40x30x22 170mm (S) / 175mm (M, L)
- Boîtier Pédalier - Bottom Bracket
SQUARE CH 52 127MM
- Cassette - Sprocket
SUNRACE CSM90 9s 11-36T
- Chaîne - Chain
YBN 9-SPEED
- Freins (avt-arr) - Brakes (front-rear)
SHIMANO HYDRAULIC MT200
- Disques - Rotors
SHIMANO SMRT10 160mm / 160mm CENTERLOCK
- Levier - Shiftlevers
COMBO SHIMANO STEF505 3x9s/ hydraulic brake lever

OVERSEAS : (1) Alex rims

EDGE 2.9 / 2.7



- Jeu de direction - Headset
FSA NO.10. ED 1-1/8" + XLC logo
- Cintre - Handlebar
LAPIERRE 6061 ALLOY W: 700mm R: 15mm Ø: 31.8mm
- Poignées - Grips
LAPIERRE by HERRMANS DD30B
- Potence - Stem
XLC ALLOY 7° Ø: 31.8mm L: 60mm (S, M, L)
- Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm
- Selle - Saddle
XLC W by DDK
- Moyeu avant - Front hub
SHIMANO HBTX505 32H CENTER LOCK
- Moyeu arrière - Rear hub
SHIMANO FHTX505 32H CENTER LOCK
- Jantes - Rims
RODI FW DOUBLE WALL 27.5X19C DISC (1)
- Pneus - Tires
TOUGH TOM K-Guard 27.5X2.25 / RAPID ROB K-Guard 27.5X2.10
- Pédales - Pedals
NW 91K steel cage

- Cadre - Frame
EDGE 29" SUPREME 5 ALLOY DISC INTERNAL ROUTING
- Fourche - Fork
SUNTOUR XCT-HLO-DS-29"/27.5" PM 100MM travel
- Dérailleur arrière - Rear Derailleur
SHIMANO TX RDTX800 8-Speed
- Dérailleur avant - Front Derailleur
SHIMANO TOURNEY FDTY500
- Pédalier - Crankset
SHIMANO FCYT301 42x34x24 170mm (XS, S) / 175mm (M, L, XL)
- Boîtier Pédalier - Bottom Bracket
SQUARE CH 52 127MM
- Cassette - Sprocket
SUNRACE CSM400 8Spd 12-32
- Chaîne - Chain
YABAN YBN S52 8-SPEED
- Freins (avt-arr) - Brakes (front-rear)
SHIMANO HYDRAULIC MT200
- Disques - Rotors
SHIMANO SMRT10 160mm / 160mm CENTERLOCK
- Levier - Shiftlevers
SHIMANO STEF505 3x8-SPEED/ HYDRO BRAKE LEVER

- Jeu de direction - Headset
FSA NO. 10 W: XLC Logo
- Cintre - Handlebar
29": XLC 6061 ALLOY W: 720mm Flat Ø: 31.8mm
27.5": XLC 6061 ALLOY W: 720mm R: 15mm Ø: 31.8mm
- Poignées - Grips
VELO DOUBLE DENSITY BLACK
- Potence - Stem
XLC ALLOY 7° Ø: 31.8mm L: 60mm(XS, S, M, L) / 80mm (XL)
- Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm
- Selle - Saddle
XLC by DDK
- Moyeu avant - Front hub
SHIMANO HBTX505 32H CENTER LOCK
- Moyeu arrière - Rear hub
SHIMANO FHTX505 32H CENTER LOCK
- Jantes - Rims
ALLOY DOUBLE WALL 29/27.5X19C DISC
- Pneus - Tires
29/27.5X2.10 MITAS OCELOT
- Pédales - Pedals
NW 91K steel cage

EDGE 2.7 W



W WOMEN SERIES



Cadre - Frame
EDGE 27.5" WOMEN SUPREME 5 ALLOY DISC INTERNAL ROUTING

Fourche - Fork
SUNTOUR XCT-HLO-DS-27.5" PM 100MM travel

Dérailleur arrière - Rear Derailleur
SHIMANO TX RDTX800 8-Speed

Dérailleur avant - Front Derailleur
SHIMANO TOURNEY FDTY500

Pédalier - Crankset
SHIMANO FCTY301 42x34x24 170mm (S, M) / 175mm (L)

Boîtier Pédalier - Bottom Bracket
SQUARE CH 52 127MM

Cassette - Sprocket
SUNRACE CSM400 8Spd 12-32

Chaîne - Chain
YABAN YBN S52 8-SPEED

Freins (avt-arr) - Brakes (front-rear)
SHIMANO HYDRAULIC MT200

Disques - Rotors
SHIMANO SMRT10 160mm / 160mm CENTERLOCK

Levier - Shiftlevers
SHIMANO STEF505 3x8-SPEED/ HYDRO BRAKE LEVER

Jeu de direction - Headset
FSA NO. 10 W: XLC Logo

Cintre - Handlebar
XLC 6061 ALLOY W: 700mm R: 15mm Ø: 31.8mm

Poignées - Grips
VELO DOUBLE DENSITY BLACK

Potence - Stem
XLC ALLOY 7° Ø: 31.8mm L: 60mm(S, M, L)

Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm

Selle - Saddle
XLC by DDK for Women

Moyeu avant - Front hub
SHIMANO HBTX505 32H CENTER LOCK

Moyeu arrière - Rear hub
SHIMANO FHTX505 32H CENTER LOCK

Jantes - Rims
ALLOY DOUBLE WALL 27.5X19C DISC

Pneus - Tires
27.5X2.10 MITAS OCELOT

Pédales - Pedals
NW 91K steel cage

EDGE 1.7 (V-Brake)



Cadre - Frame
EDGE 27.5" SUPREME 4 ALLOY V-BRAKE

Fourche - Fork
SUNTOUR XCE-P-27.5" 80mm travel

Dérailleur arrière - Rear Derailleur
SHIMANO TX RDTX800 8-Speed

Dérailleur avant - Front Derailleur
SHIMANO TOURNEY FDTY500

Pédalier - Crankset
SHIMANO FCTY301 42x34x24 170mm (XS, S) / 175mm (M, L, XL)

Boîtier Pédalier - Bottom Bracket
SQUARE CH 52 127MM

Cassette - Sprocket
SUNRACE CSM400 8Spd 12-32

Chaîne - Chain
YABAN YBN S52 8-SPEED

Freins (avt-arr) - Brakes (front-rear)
ALHONGA V-BRAKE

Levier - Shiftlevers
SHIMANO ALTUS STEF500 3x8-SPEED

Jeu de direction - Headset
FSA NO. 10 W: XLC Logo

Cintre - Handlebar
XLC 6061 ALLOY W: 720mm R: 15mm Ø: 31.8mm

Poignées - Grips
VELO DOUBLE DENSITY BLACK

Potence - Stem
XLC ALLOY 7° Ø: 31.8mm L: 60mm(XS, S, M, L) / 80mm (XL)

Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm

Selle - Saddle
XLC by DDK

Moyeu avant - Front hub
SHIMANO HB-TX500 32H

Moyeu arrière - Rear hub
SHIMANO HB-TX500 8/9Spd 32H

Jantes - Rims
ALLOY DOUBLE WALL 27.5X19C

Pneus - Tires
27.5X2.10 MITAS OCELOT

Pédales - Pedals
NW 91K steel cage

MTB

EDGE 1.7 W (V-Brake)



W WOMEN SERIES



● Cadre - Frame
EDGE 27.5" SUPREME 4 ALLOY V-BRAKE

● Fourche - Fork
SUNTOUR XCE-P-27.5" 80mm travel

● Dérailleur arrière - Rear Derailleur
SHIMANO TX RDTX800 8-Speed

● Dérailleur avant - Front Derailleur
SHIMANO TOURNEY FDTY500

● Pédalier - Crankset
SHIMANO FCTY301 42x34x24 170mm (XS, S) / 175mm (M, L, XL)

● Boîtier Pédalier - Bottom Bracket
SQUARE CH 52 127MM

● Cassette - Sprocket
SUNRACE CSM400 8Spd 12-32

● Chaîne - Chain
YABAN YBN S52 8-SPEED

● Freins (avt-arr) - Brakes (front-rear)
ALONGHA V-BRAKE

● Levier - Shifters
SHIMANO ALTUS STEF500 3x8-SPEED

● Jeu de direction - Headset
FSA NO. 10 W-XLC Logo

● Cintre - Handlebar
XLC 6061 ALLOY W: 720mm R: 15mm Ø: 31.8mm

● Poignées - Grips
VELO DOUBLE DENSITY BLACK

● Potence - Stem
XLC ALLOY Ø: 31.8mm L: 60mm(XS, S, M, L) / 80mm (XL)

● Tige de selle - Seatpost
XLC ALLOY Ø: 27.2mm L: 350mm

● Selle - Saddle
XLC by DDK

● Moyeu avant - Front hub
SHIMANO HB-TX500 32H

● Moyeu arrière - Rear hub
SHIMANO HB-TX500 8/9Spd 32H

● Jantes - Rims
ALLOY DOUBLE WALL 27.5X19C

● Pneus - Tires
27.5X2.10 MITAS OCELOT

● Pédales - Pedals
NW 91K steel cage

